BRASILIA





AVAILABLE IN:

8mm Tiles

Rectified Edge

12"x24" Field Polished Finish

8mm Tiles

Pressed Edge

4"x12" Wall 12″x24″ Field Glossy Finish Matte Finish

Mosaics

2"x2" Mosaic

Matte Finish

- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE			
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/₀″x3″ 2″x4″		
		BRICKS		DIAMONDS			
			1"x2" 1"x3" 1 ³ /8"x3" 2"x4"		2"		
FIELD SHAPES*		CHEVRONS		HERRINGBONE			
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"		
Diamond	4″				⁵ / ₈ "x4"		
		OCTAGONS		HEXAGONS			
Hexagon	6″						
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 ¹ / ₈ " 2"		
TRAPEZOID W/ DOT		SQUARES		RECTANGLES			
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1″x2″ 1″x4″		

Trim Pieces

4"x12" Bullnose

4"x24" Bullnose

Glossy Finish

Matte Finish

Belmar White




Fossile




Onyx Perola




2"X2" MOSAIC





Belmar White



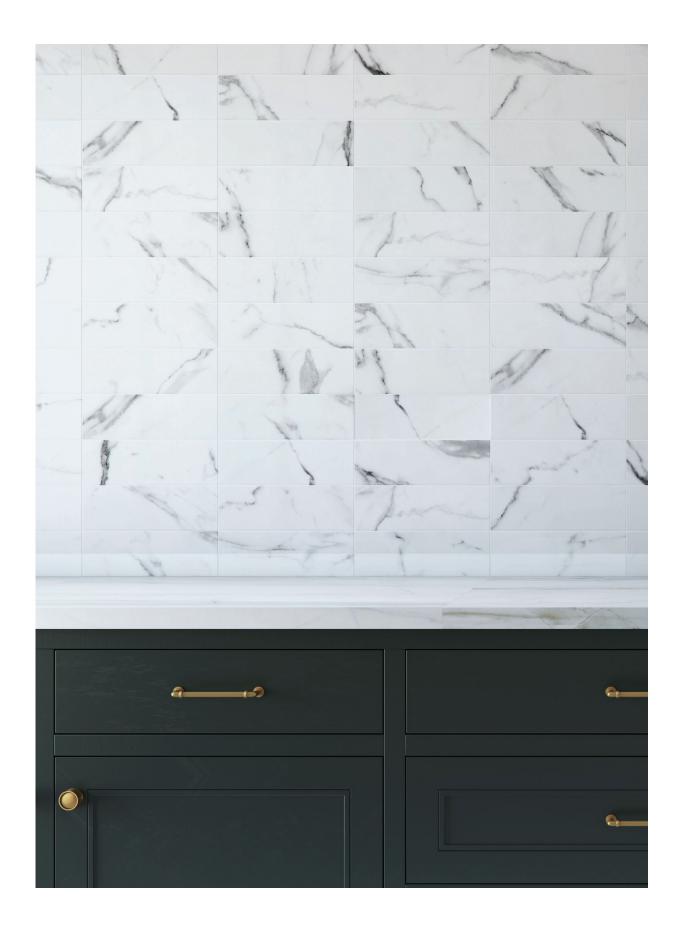

12"x24" Field Tile | 2"x2" Mosaic in Onix Perola 4"x12" Wall Tile in Onix Perola

4"x12" Wall Tile in Belmar White



BRASILIA Ceramic Tile



Features	Test Method	Value	
Water Absorption	ASTM C373-18	≤ 0.5	
Abrasion Resistance	ASTM C1027-19	4	
Scratch Hardness (MOHS)	-	4	
Breaking Strength	ASTM C648-04	275	
Chemical Resistance	ASTM C650-04	Class A	
Frost Resistance	ASTM C1026	Resistant	
Stain Resistance	ASTM C1378-04	Class B	
DCOF (WET)	ANSI A326.6	≥0.42	
Recycled Material	-	4%	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Features	Test Method	Value	
Water Absorption	ASTM C373-18	7.0 ≤ x <20.0	
Scratch Hardness	-	3	
Breaking Strength	ASTM C648-04	125	
Chemical Resistance	ASTM C650-04	Class A	
Stain Resistance	ASTM C1378-04	Class A	
Frost Resistance	ASTM C1026	Not Resistant	
Recycled Material	-	14%	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Tile
- Glossy Finish
- 8mm Thickness
- Pressed Edge
- V3 Moderate Variation
- Frost Resistance = No

Product Info:

- Glazed Porcelain Tile
- Matte | Polished Finishes
- 8mm Thickness
- Rectified | Pressed Edge
- PEI Rating = 4
- V3 Moderate Variation
- Frost Resistance = Yes

BRASILIA Glazed Porcelain Tile



www.genrose.com



www.genrose.com