
BRECCIA







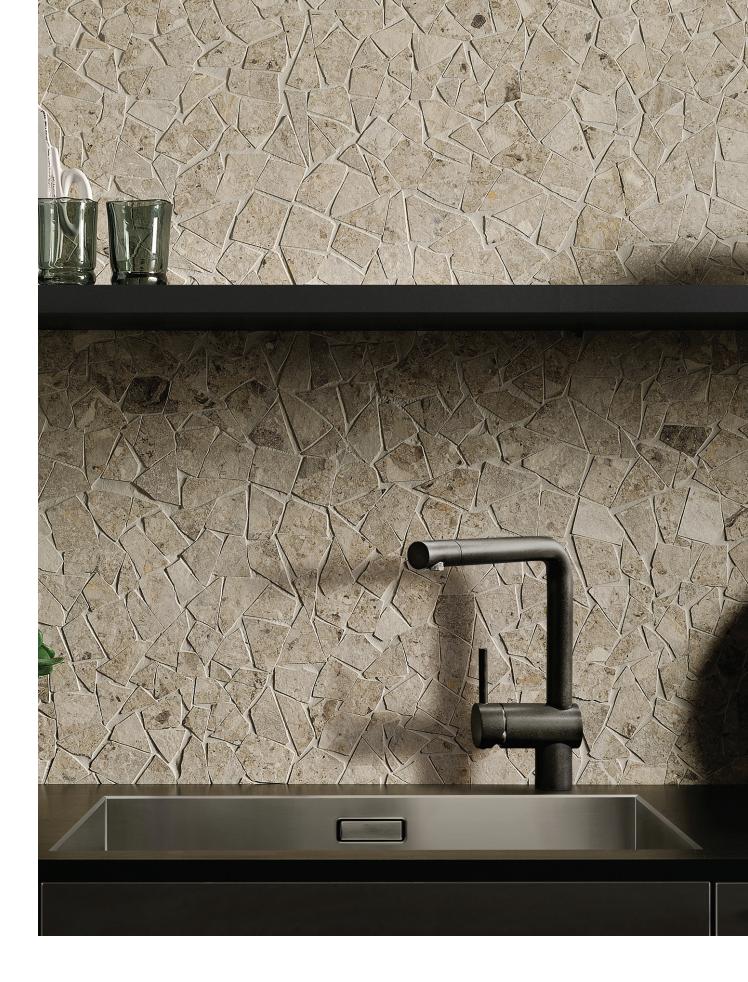


Palladiana Mosaic in Beige





12″x24″ Field Tile in Grigio Scuro

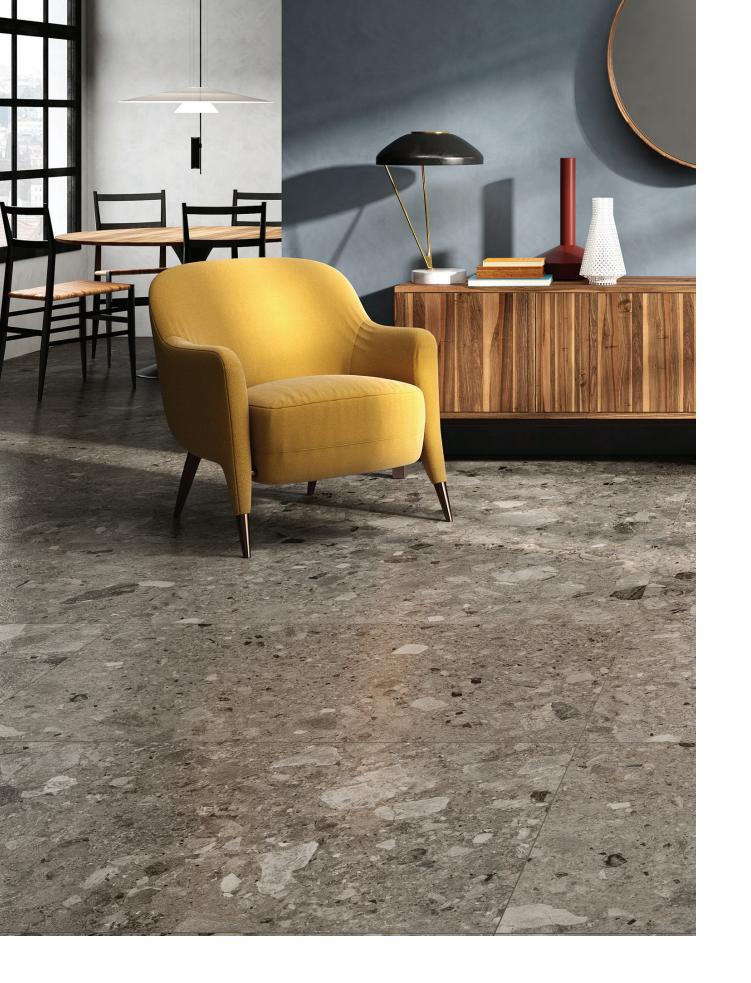





24"x48" Field Tile in Antracite

AVAILABLE IN:

Field Tile

24"x48"	10mm Natural Half-Polished Outdoor Finish Rectified Edge
8″x48″	10mm Natural Finish Rectified Edge
24"x24"	10mm Natural Half-Polished Outdoor Finish Rectified Edge
12"x24"	9mm Natural Half-Polished Outdoor Finish Rectified Edge

Mosaics

2"x2"	Mosaic Natural Finish Rectified Edge		
	Palladiana Mosaic Natural Finish Tumbled Edge		

Trim Pieces

3"x24" Bullnose Natural | Half-Polished Finish Rectified Edge



MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 ³ / ₈ "x3" 2"x4"
		BRI	CKS	DIAM	ONDS
			1"x2" 1"x3" 1 ³ /8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"			* \\$ \\$ \\$	⁵ / ₈ "x4"
		OCTA	GONS	HEXA	GONS
Hexagon	6"		2"		11/ "
Chevron	2"×12" 6"×24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ /2" w/ ⁵ /8" Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

Bianco



Beige



Antracite

*Other sizes available upon request



Grigio Chiaro



Grigio Scuro




2"X2" MOSAIC



PALLADIANA MOSAIC

12"x24" Field Tile in Bianco

Available in all colors.





Features	Test Method	Value	
Length and Width		±0.6% / ±2mm	
Thickness		±5% / ±0.5mm	
Straightness of Sides		±0.5% / ±1.5mm	
Rectangularity	ISO 10545-2	±0.5% / ±2mm	
Surface Flatness		±0.5% / ±2mm	
Surface Quality		95% of tiles with no defaults	
Water Absorption	ISO 10545-3	≤ 0.5	
Average Bending Strength	ISO 10545-4	35 N/mm² min	
Resistance To Surface Abrasion	ISO 10545-7	4	
Crazing Resistance	ISO 10545-11	Required	
Frost Resistance	ISO 10545-12	Required	
Chemical Resistance	ISO 10545-13	Min. GB	
Stain Resistance	ISO 10545-14	Min. Class 3	
Reaction to Fire	Based on the decision 96/603/CE and its changes	A1 _{FL} /A1	
Breaking Strength Thickness \ge 7.5mm		>1300N	
Breaking Strength Thickness < 7.5mm		>700N	
Thermal Shock Resistance	EN 14411: 2012	Pass	
Durability for Internal and External Use		Pass	
DCOF		0.53	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
 - Natural | Semi-Polished | Outdoor Finish
 - 9mm | 10mm Thicknesses •
 - Rectified | Tumbled Edge •
 - PEI Rating = 4 •
 - V3 Moderate Variation
 - Frost Resistance = Yes

BRECCIA

Color Body Porcelain Tile



www.genrose.com



www.genrose.com