CLINTON








24"x48" Field Tile in Cemento Sand 24"x24" Field Tile in Cemento Black







12"x24" Field Tile in Cemento White 24"x24" Field Tile in Cemento Sand

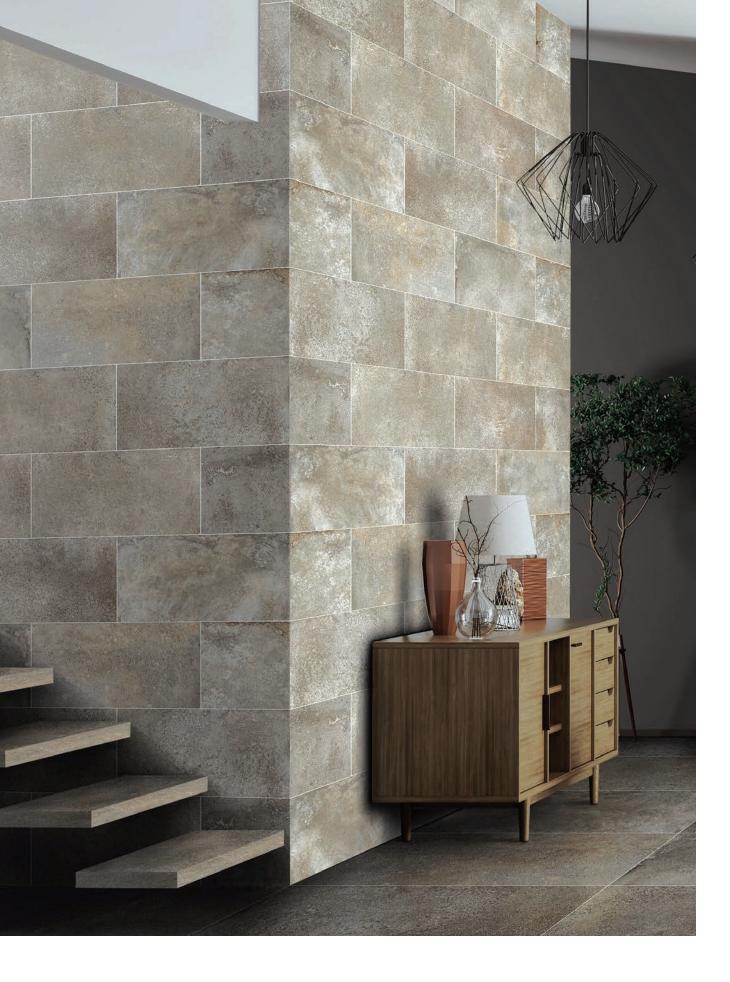



AVAILABLE IN:

8mm Field Tile

Rectified Edge

12"x24"	Honed Anti-Slip Finish
24"x24"	Honed Anti-Slip Finish
24"x48"	Honed Anti-Slip Finish

8mm Mosaic

2"x2" Mosaic Honed Finish

Trim Pieces

6″x12″	Cove Base Honed Finish
4"x24"	Bullnose Honed Finish

- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:


This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any		2" 4"		1 ³ /8"x3" 2"x4"
	length and width	BRICKS		DIAMONDS	
	combination with a 1″ minimum.		1 "x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" ⁵ /8"x4"
Diamond	4"		0000		
Hexagon	6"		GONS 2"	HEXA	
Chevron	2"x12" 6"x24"		z w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ /2" w/ ⁵ /8" Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

*Other sizes available upon request



Cemento White

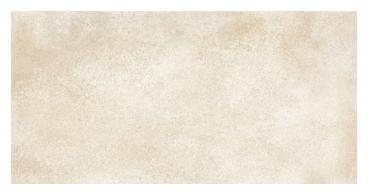

Cemento Sand



Cemento Argent



Cemento Toupe



Cemento Greige



Cemento Black

2"X2" MOSAIC





			1929	19
	12			
19	131	32		
1	3	1		
1		1		

13		1990			
35	100	1	100	201	
381	26	1	No.		No.
	2	R			3
					AN.
ES.		1	160	19%	22



	1	No.	10
	0.19		
		1987	
		23	
1		:::5	26

Cemento White

Cemento Sand


Cemento Argent

Cemento Greige

Cemento Toupe

Cemento Black







Bullnose





Features	Test Method	Value	
Water Absorption	ASTM C373	≤ 0.1%	
Bond Strength	ASTM C482	≥ 200 psi	
Warpage Average Diagonal		$\leq \pm 0.40\%$	
Warpage Average Edge	ASTM C485	≤ ± 0.40%	
Thickness Dimension	A 675 A 6 400	≤ ± 0.04 Inc.	
Facial Dimension	ASTM C499	≤ ± 0.25%	
Wedging	ASTM C502	≤ ± 0.25%	
Breaking Strength	ASTM C648	≥ 400 lb.	
Chemical Resistance	ASTM C650	Class A	
Frost Resistance	ASTM C1026	Resistant	
Visible Abrasion Resistance for Glazed Tiles	ASTM C1027	Class 4	
Stain Resistance	ASTM C1378	Class A*	
DCOF-Honed	DOT 2000	≥ 0.50	
DCOF-Textured	BOT 3000	≥ 0.65	
Hardness (Mohs)	Scratch Test (No regulated)	≥ 7	
Aesthetic Classification	Visual Evaluation Shade & Texture	V2	

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

*All values given are for matte or honed material. No values are given for polished material. GENROSE does not recommend polished surfaces in areas subject to exposure from grease, oil or water.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide.

Product Info:

- Glazed Porcelain Tile
- Honed | Anti-Slip Finish
- 8mm Thickness
- Rectified Edge
- PEI Rating = 4
- V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com