
# **LIVORNO**








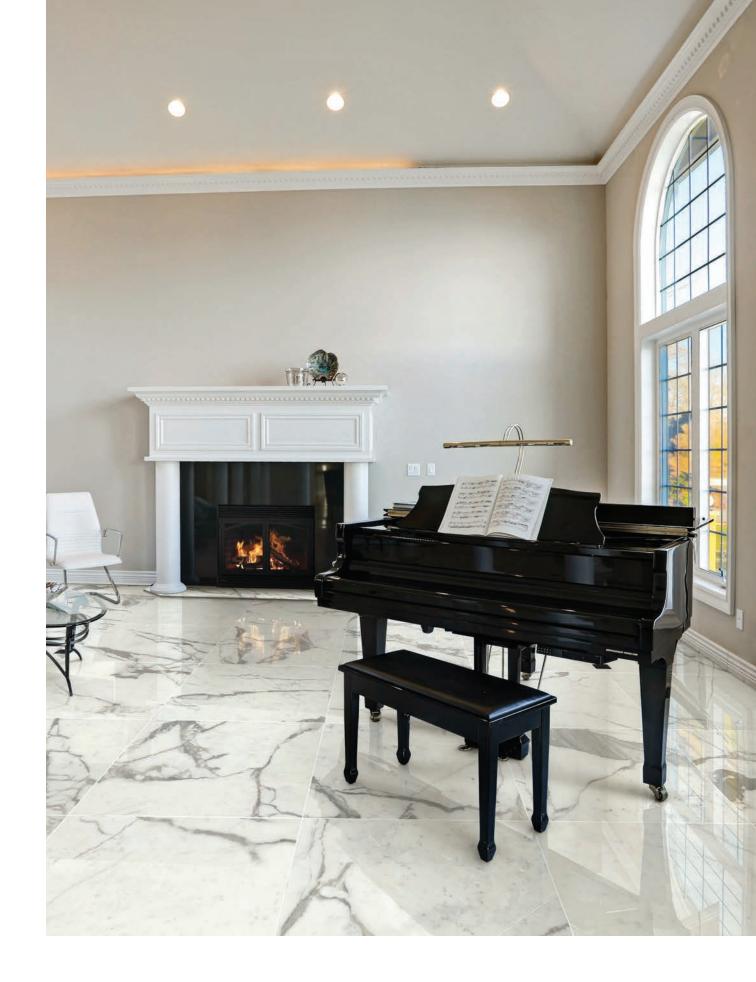

30"x60" Field Tile in Bernini Oro 120"x60" Slab in Zebrino Carrara



30"x60" Field Tile in Bernini Classico 126"x60" Slab | Bookmatch in Bernini Oro

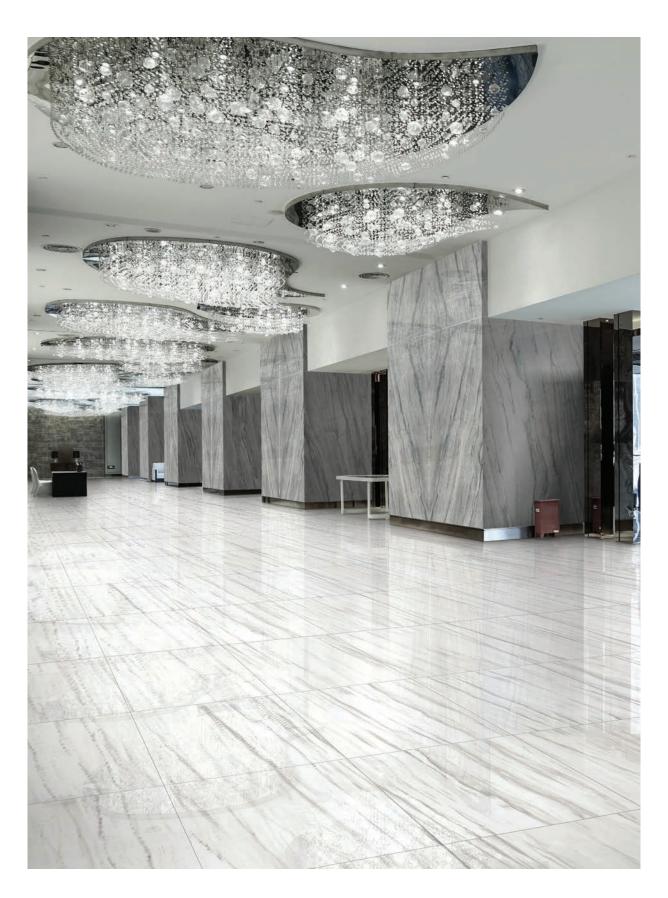

30"x30" Field Tile in Zebrino Carrara 120"x60" Slab | Bookmatch in Platinum Grey



30"x30" Field Tile in Platinum Grey 126"x60" Slab | Bookmatch in Platinum Grey



30"x30" Field Tile in White Statuario 120"x60" Slab in Zebrino Carrara

### **AVAILABLE IN:**

#### Slab

126"x60" 12mm Polished Finish

126"x60" 12mm Bookmatch A/B Polished Finish\*\*

120"x60" 6mm Random Chain/4 Face Honed\* | Polished Finish

#### Field Tile

60"x60" 6mm Honed\* | Polished Finish\*

30"x60" 6mm Honed\* | Polished Finish

30"x30" 6mm Honed\* | Polished Finish

\*\*Available in Bernini Oro | Bernini Classico | White Statuario | Platinum Grey

- All sizes are nominal





Zebrino Carrara



Bernini Oro



Bernini Classico



Taj Mahal




White Statuario



**Platinum Grey** 

Colors shown may vary from actual product. Final selection should be made from actual product samples.

<sup>\*</sup>Not Available in Taj Mahal

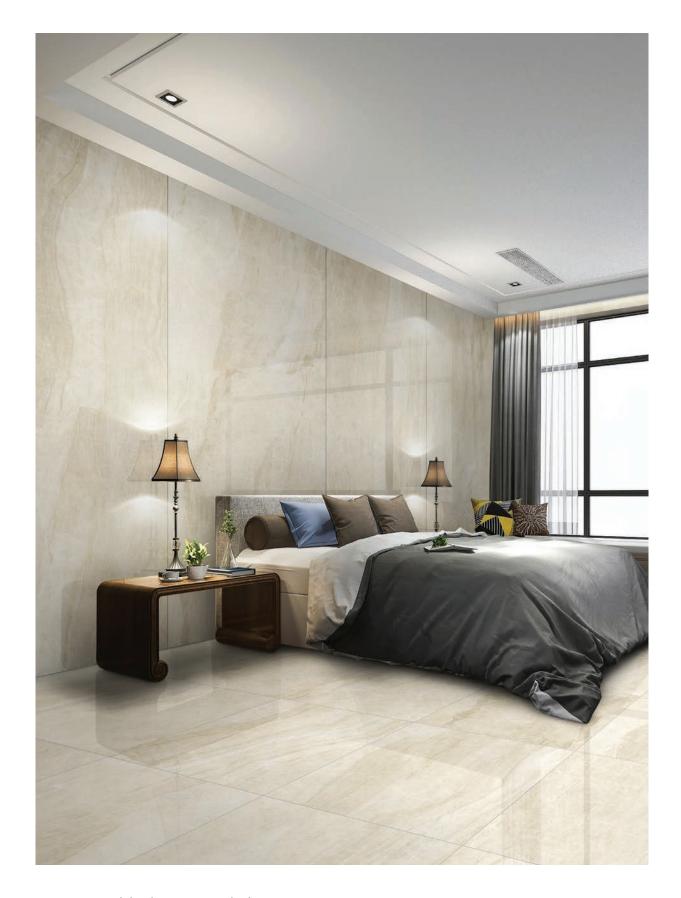

30"x30" Field Tile in Taj Mahal 120"x60" Slab in Taj Mahal



## **LIVORNO**Color Body Porcelain Tile

Features	Test Method	Value
Water Absorption	ASTM C373	≤0.1%
Thickness Dimension	ASTM C499	≤±0.02 Inc.
Length / Width Variation (Variation from average facial dimension )	ASTM C499	≤ ± 0.25%
Wedging	ASTM C502	≤ ± 0.25%
Dry Bond Strength	Section 7.5	≥ 200 psi
Breaking Strength	ASTM C648	≥200 lb.
Hardness (MOHS)	Scratch Test (No regulated)	≥ 7
Deep Abrasion Resistance	ASTM C1243	≤ 175 mm
Frost Resistance	ASTM C1026	Resistant
Robinson Test	AC627	Extra Heavy
Chemical Resistance	ASTM C650	А
Stain Resistance	ASTM C1378	A*
Dynamic Coefficient of Friction	ANSI A137.1	≥0.42-≤0.60*
Aesthetic Classification	Visual Evaluation Shade & Texture	V1-V3
Light Reflectance Value (L.R.V)	ASTM C609	10 to 80 Depending on Style/Color Selection

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.
\*All values given for Honed Finish

#### **Product Info:**

- Color Body Porcelain Tile
- Polished | Honed Finishes
- 6mm | 12mm Thicknesses
- Rectified Edge
- PEI Rating = 5
- V2 Slight Shading Variation
- Frost Resistance = Yes





www.genrose.com



www.genrose.com