MIDTOWN







AVAILABLE IN:

9.5mm Floor/Wall Tile

Pressed Edge


2"x10" Matte | Polished Finish


- All sizes are NOMINAL

Trim Piece

0.2"x10" Quarter Round Matte | Polished Finish



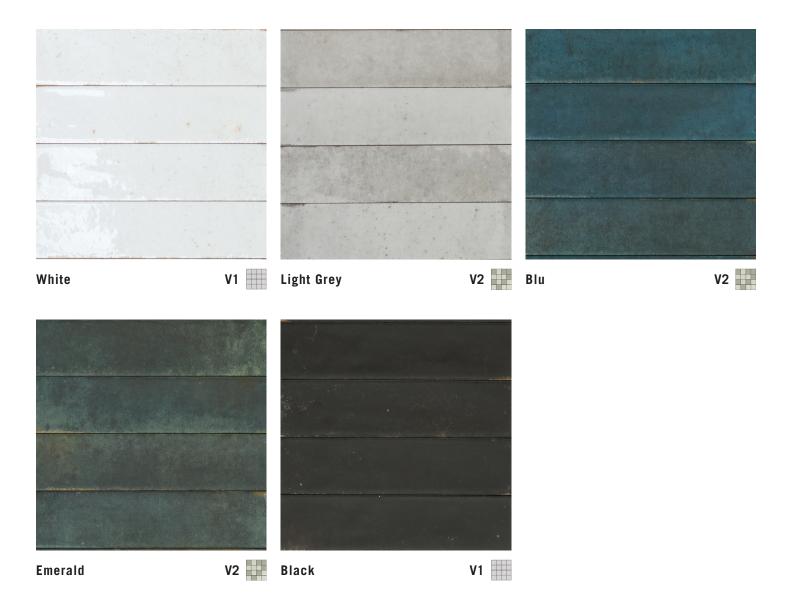

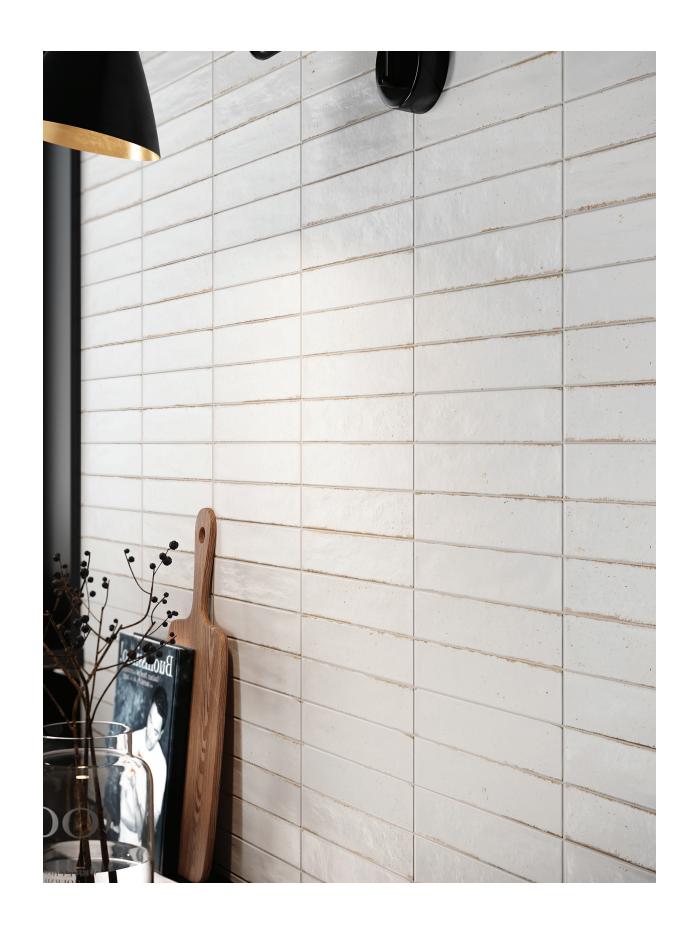





MIDTOWN Glazed Porcelain Tile

Features	Test Method	Value			
		N < 7cm	7cm ≤ N < 15cm N ≥ 15cm		
Length and Width	ISO 10545-2	± 0.5mm	± 0.9mm	± 0.6mm	± 2mm
Thickness		± 0.5mm	± 0.5mm	± 0.5mm	± 0.5mm
Straightness of Sides		N/A	± 0.75mm	± 0.5mm	± 1.5mm
Squareness		N/A	± 0.75mm	± 0.5mm	± 2mm
Planarity		N/A	± 0.75mm	± 0.5mm	± 2mm
Water Absorption	ISO 10545-3	< 0.2%			
Bending Strength	ISO 10545-4	> 40 N/mm²			
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm³			
Frost Resistance	ISO 10545-12	Resistant			
Resistance to Low/High Concentrations of Alkalis and Acids		Low: LA			
Resistance to Household Chemical Products	ISO 10545-13	High: HA			
and Swimming Pool Additives		А			
Stain Resitance	ISO 10545-14	Class 5			
Hardness in Mohs Degrees	UNI EN 101	5			
Slip Resistance (Coefficient of Friction)	DCOF	> 0.42			
Recycled Content	-	52%			
This product will contribute to GBC Italia registered LEED projects.					

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.





- Glazed Porcelain Tile
- Matte | Polished Finish
- 9.5mm Thickness
- Pressed Edge
- PEI Rating = 5 (White | Light Grey), 3 (Blu | Emerald | Black)
- V1 Uniform Appearance | V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com