PIERRE










12"x24" Field Tile in Tinenza

AVAILABLE IN:

9.5mm Field Tiles							
SIZE	FINISH		COLORS				
12"x24"	Matte Polished		Tinenza				
24"x48"	Matte Polished		Tinenza				
9.5mm Wall Tile							
SIZE	FINISH		COLORS				
3"x12"	Polished		Tinenza				
9.5mm Mosaics							
SHEET SIZE	ТҮРЕ	FINISH	COLORS				
12"x12"	2"x2" Mosaic	Matte	Tinenza				
12.6"X8.7"	Hexagon Mosaic	Matte	Tinenza				
13"×10"	Herringbone	Polished	Tinenza				

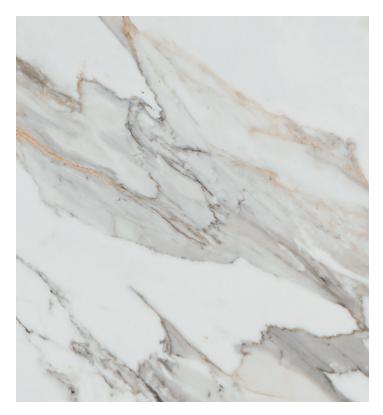

MADE TO ORDER FIELD TILES AND MOSAICS: Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1³/8″x3″ 2″x4″
	a smaller size in any length and width combination with a 1″ minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ /8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"				⁵ / ₈ "×4"
		OCTAGONS		HEXAGONS	
A Hexagon	6"		0.11		
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZO	ID W/ DOT	SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

Tinenza

*Other sizes available upon request All Sizes are Nominal.



2"X2" MOSAIC


HEXAGON MOSAIC

HERRINGBONE MOSAIC







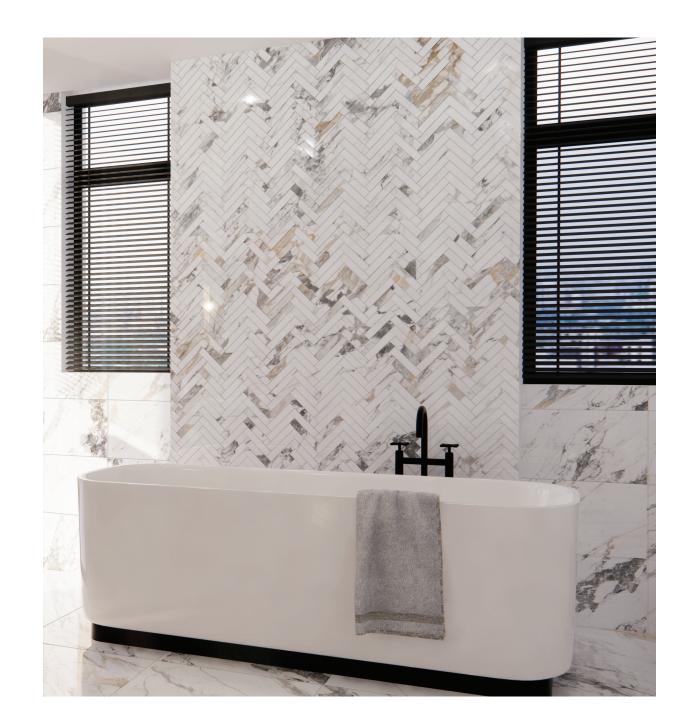



Features	Test Method	Value		
Water Absorption	ISO 10545-3	≤ 0.5%		
Breaking Strength	ISO 10545-4	1,600 - 2,400 N		
Modulus of Rupture	ISO 10545-4	35 – 45 N/mm²		
Thermal Resistance	ISO 10545-9	Resistant		
Crazing Resistance	ISO 10545-11	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Chemical Resistance	ISO 10545-13	Class A		
Stain Resistance	ISO 10545-14	5		
Recycled Material	-	31%		



This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile
- Matte | Polished Finishes
- 9.5mm Thickness
- Rectified Edge
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com