
# **STRAND**







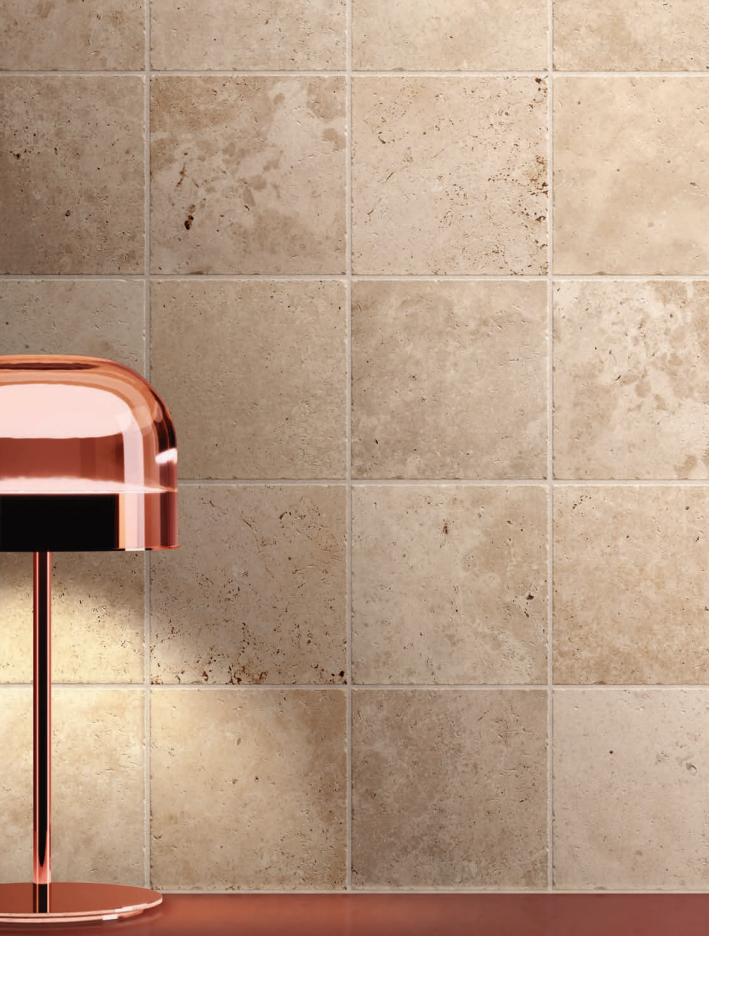

8"x8" Field Tile in Marmo Primavera Modular Pattern 39 in Perlato di Sicilia

### **AVAILABLE IN:**

### 10mm Field Tiles

Pressed Edge

8"x8" Matte Finish 8"x16" Matte Finish 16"x16" Matte Finish 16"x24" Matte Finish

### Trim Piece

2.5"x16" Battiscopa Matte Finish



#### Mosaics

Modular Pattern 39 Matte Finish\*
Modular Pattern 41 Matte Finish\*\*

- All sizes are NOMINAL

## MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/ <sub>8</sub> "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"	0.074	0010		
		OCTAGONS		HEXAGONS	
Hexagon  Chevron	6" 2"x12" 6"x24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"







Travertino Navona

Marmo Primavera




Perlato di Sicilia

### MODULAR PATTERN 39



# **MODULAR PATTERN 41**







Perlato di Sicilia





Features	Test Method	Value	
Length and Width		± 0.5% ± 2 mm	
Thickness		± 5% ± 0.5 mm	
Straightness of Sides	ISO 10545-2	± 0.3% ± 1.5 mm	
Rectangularity		± 0.3% ± 1.5 mm	
Surface Flatness		± 0.3% ± 1.5 mm	
Water Absorption	ISO 10545-3 E ≤ 0.3% Bla GL		
Frost Resistance	ISO 10545-12	Resistant	
Thermal Shock Resistance	ISO 10545-9	Resistant	
Crazing Resistance	ISO 10545-11	Resistant	
Scratch Hardness	-	> 6	
Surface Abrasion Resistance	ISO 10545-7	Class 4-5	
Resistance to Household Chemicals	ISO 10545-13	Class A	
Resistance to Low Concentrations of Acids and Alkalis	150 10545-15	Class LA	
Stain Resistance	ISO 10545-14	Class 5	
Bending Strength	ISO 10545-4	R ≥ 35 N/mm²	
DCOF	-	> 0.42	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Glazed Porcelain Tile
- Matte Finish
- 10mm Thickness
- Pressed Edge
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com