ASPIRE










8"x32" | 16"x32" | 32"32" Field Tile in Ivoire

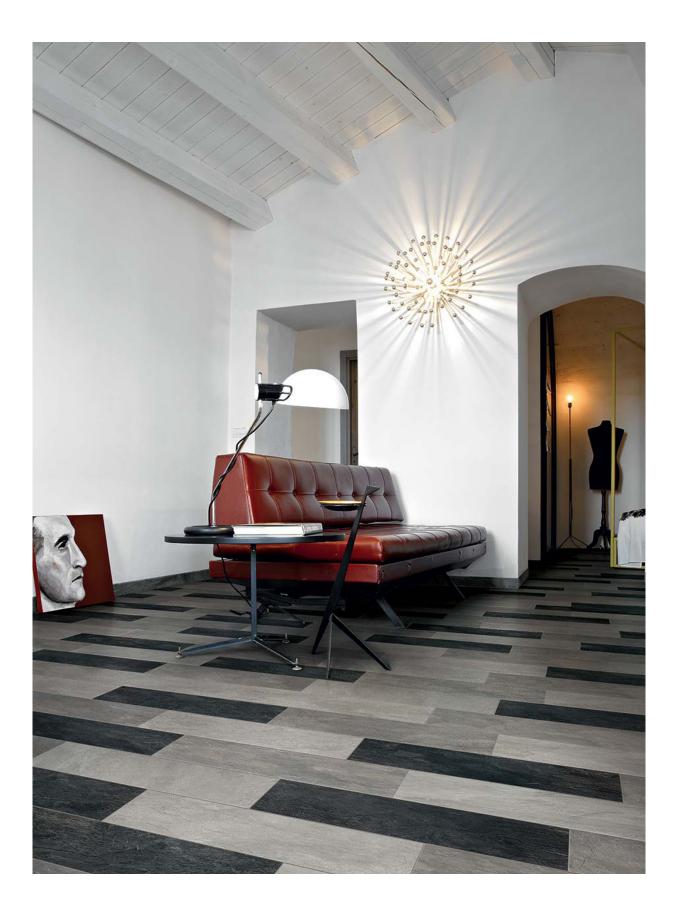



2″x24″ Bullnose in Plombe 9″x16″ Listello Sfalsato Mosaic in Gris 24″x48″ Field Tile in Plombe





2"x24" Bullnose in Ecru 12"x12" | 12"x24" Field Tile in Ecru

AVAILABLE IN:

24"x48"

48"x48"

10mm Field Tile

Rectified Edge

6mm Field Tile *Only available in Blanc | Ecru | Gris | Noir Rectified Edge

Mosaics

2"x2"	Mosaic Matte Finish
8″x16″	Listello Sfalsato Mosaic Matte Finish
12"x12"	3D Muretto Mosaic Matte Finish

Trim Pieces

2"x24"

Bullnose Matte Finish



4″x12″	Matte Finish
8″x32″	Matte Anti-Slip Finish
12″x12″	Matte Finish
12″x24″	Matte Finish
16″x32″	Matte Anti-Slip Finish
24"x48"	Matte Finish
32″x32″	Matte Anti-Slip Finish

Matte Finish

Matte Finish

- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 ³ /8"x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ /8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" ⁵ /8"x4"
Diamond	4 "			~ ~ ~	
		OCTAGONS		HEXAGONS	
Hexagon	6"		2"		1 ¹ / ₈ "
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

*Other sizes available upon request



Blanc



lvoire



Ecru



Gris



Plombe



Noir

2"X2" MOSAIC



8"X16" LISTELLO SFALSATO MOSAIC









lvoire

Ecru



Gris

Blanc







Plombe

Noir



Features	Test Method	Val	ue
Length and Width		± 0.15%	
Admitted Deviation		± 5%	
Maximum Straightness Deviation		± 0.1%	
Maximum Right-angle Deviation	ISO-10545-2	± 0.2%	
Warpage	-	± 0.35%	
Surface Quality		At least 95% of the tiles must be free from visible flaws	
Water Absorption	ISO-10545-3	0.08%	
Breaking Strength	ISO-10545-4	3200 N	
Bending Strength	130-10343-4	50 N/mm ²	
Abrasion Resistance	ISO-10545-6	140	
Thermal Shock Resistance	130-10343-0	Resistant	
Frost Resistance	ISO-10545-12		
Chemical Resistance	ISO-10545-13	Domestic Chemicals UA	Low Concentratio ULA
Stain Resistance	ISO-10545-14	Class 4	
Slip Resistance with Shoes	DIN-51130:2010	Matte Anti-Slip R10 R11	
Barefoot Slip Resistance - Anti-Slip Finish	DIN-51097	Class B	
Static Coefficient of Friction	ASTM-C1028	> 0.6 Dry and Wet	
Dynamic Coefficient of Friction	DCOF section 9.6 ANSI A 137.1 2012	> 0.42 wet	
Recycled Material	-	Blanc - 0.7% Noir, Gris, Plombe, Ecru, Ivoire - 13.8%	
VCOs	-	No Emissions	

This product is GREENGUARD[®] certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Matte | Anti-Slip Finish
- 6mm | 10mm Thickness
- Rectified Edge
- V3 Moderate Variation
- Frost Resistance = Yes



Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com