BELMONT









6"x48" | 12"x48" Field Tile in White

AVAILABLE IN:

9.5mm Field Tiles

Rectified Edge

12"x48" Natural Finish 8"x48" Natural Finish 6"x48" Natural Finish

20mm Paver

Rectified Edge

16"x48" Textured Finish

- All sizes are NOMINAL


MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

| FIELD TILES | | CUBES | | BASKETWEAVE | |
|------------------|---|----------|--|-------------|--|
| | Any 24" field tile can be cut down to a smaller size in any length and width | | 2" 4" | | 1³/ ₈ ″x3″ 2″x4″ |
| | | BRICKS | | DIAMONDS | |
| | combination with a 1" minimum. | | 1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4" | | 2" |
| FIELD SHAPES* | | CHEVRONS | | HERRINGBONE | |
| Half Hexagon | 6.7" Base | | 2"x12" | | 1"x2" 2"x4" ⁵ / ₈ "x4" |
| Diamond | 4" | OCTA | GONS | HEAV | GONS |
| (Hexagon | 6" | 0014 | 2" | IIILAA | 11/8" |
| Chevron | 2"x12" 6"x24" | | w/ 0.6" Squares | | 2" |
| TRAPEZOID W/ DOT | | SQUARES | | RECTANGLES | |
| | 4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot | | 1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3" | | 1"x2" 1"x4" |

^{*}Other sizes available upon request

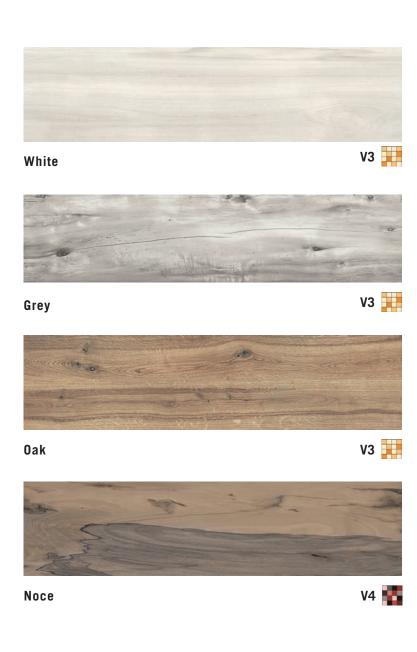





BELMONTColor Body Porcelain Tile

| Features | Test Method | Value | |
|-----------------------------|--------------------|--------------------------------|--|
| Nominal Size | ASTM C499 | -3% Min 2% Max | |
| Caliber Range | ASTM C499 | ±.25% | |
| Wedging | ASTM C502 | ±.25% | |
| Warpage Edge | ASTM C485 | ±.4% | |
| Warpage Diagonal | ASTM C485 | ±.4% | |
| Water Absorption | ISO 10545-3 | ≤ 0.5% | |
| Bending Strength | ISO 10545-4 | ≥ 45 N/mm² | |
| Breaking Strength | ISO 10545-4 | ≥ 2000 N | |
| Frost Resistance | ISO 10545-12 | Resistant | |
| Chemical Resistance | ISO 10545-13 | A LA HA | |
| Stain Resistance | ISO 10545-14 | 5 | |
| Thermal Shock Resistant | ASTM C484 | Resistant | |
| Visible Abrasion Resistance | ASTM 1027 | Dark Colors: 4 Light Colors: 5 | |
| DCOF (WET) | ANSI A 137.1- 2012 | WET ≥ 0,50 | |
| Recycled Material | - | Min 7.5% | |



This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Natural Finish
- 10mm Thickness
- Rectified Edge
- PEI Rating = 5 (Light Colors) 4 (Dark Colors)
- V3 Moderate Variation (All Other Colors)
 - V4 Substantial Variation (Noce)
- Frost Resistance = Yes



www.genrose.com



www.genrose.com