

**CELESTE**

 **GENROSE**





24"x48" Field Tile in Light Blue



24"x48" Field Tile in Charcoal



24"x48" Field Tile in Walnut

# AVAILABLE STOCKED ITEMS:

9.5mm Field Tiles			
SIZE	FINISH	EDGE	COLORS
24"x48"	Natural	Rectified	White   Almond   Charcoal   Light Blue   Grey   Walnut

All Sizes are Nominal.




White




Almond



Charcoal

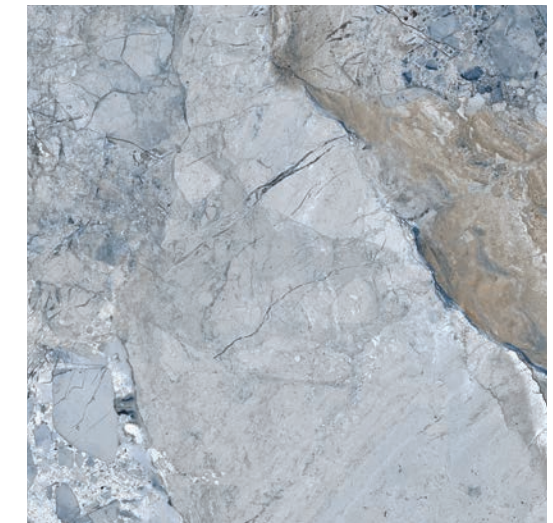

Light Blue

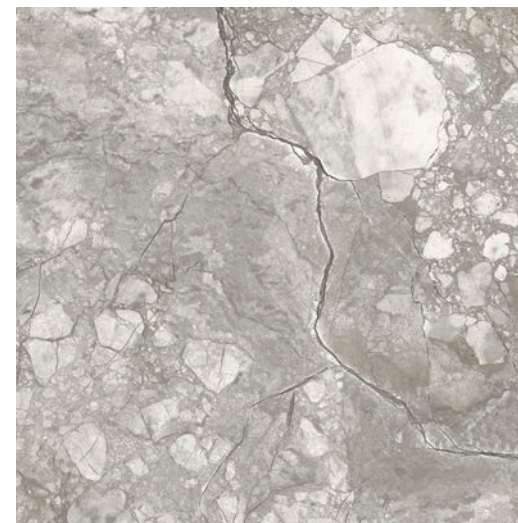

Grey



Walnut

# MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"
		BRICKS		DIAMONDS	
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"		2" w/ 0.6" Squares		1 1/8" 2"
	Chevron 2" x 12" 6" x 24"			RECTANGLES	
TRAPEZOID W/ DOT		SQUARES			
	4" x 2 1/2" w/ 5/8" Dot		1" x 1" 1 3/8" x 1 3/8"	2" x 2" 3" x 3"	1" x 2" 1" x 4"

\*Other sizes available upon request

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



24" x 48" Field Tile in Grey

Features	Test Method	Value
Thickness	-	9.5mm
Water Absorption	ISO 10545-3	≤ 0.1%
Modulus of Rupture	ISO 10545-4	> 45 N/mm <sup>2</sup>
Breaking Strength	ISO 10545-5	≥ 1300N
Scratch Hardness	UNI EN 101	7 Mohs
Abrasion Resistance	ISO 10545-7	5/4
Linear Thermal Expansion	ISO 10545-8	7x10 <sup>-6</sup> °C <sup>-1</sup>
Thermal Shock Resistance	ISO 10545-9	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	LA HA A
Stain Resistance	ISO 10545-14	Class 5
Slip Resistance	DIN 51130	R10 Natural Finish
	DIN 51097	B Natural Finish
DCOF	BS 7976-2	WET ≥ 0.42 Natural Finish
Recycled Material	-	≤ 30%
VOC	-	Low Emissions Material • Zero VOC

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Natural Finish
- 9.5mm Thickness
- Rectified Edge
- V3 - Moderate Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)