


CODE

 **GENROSE**



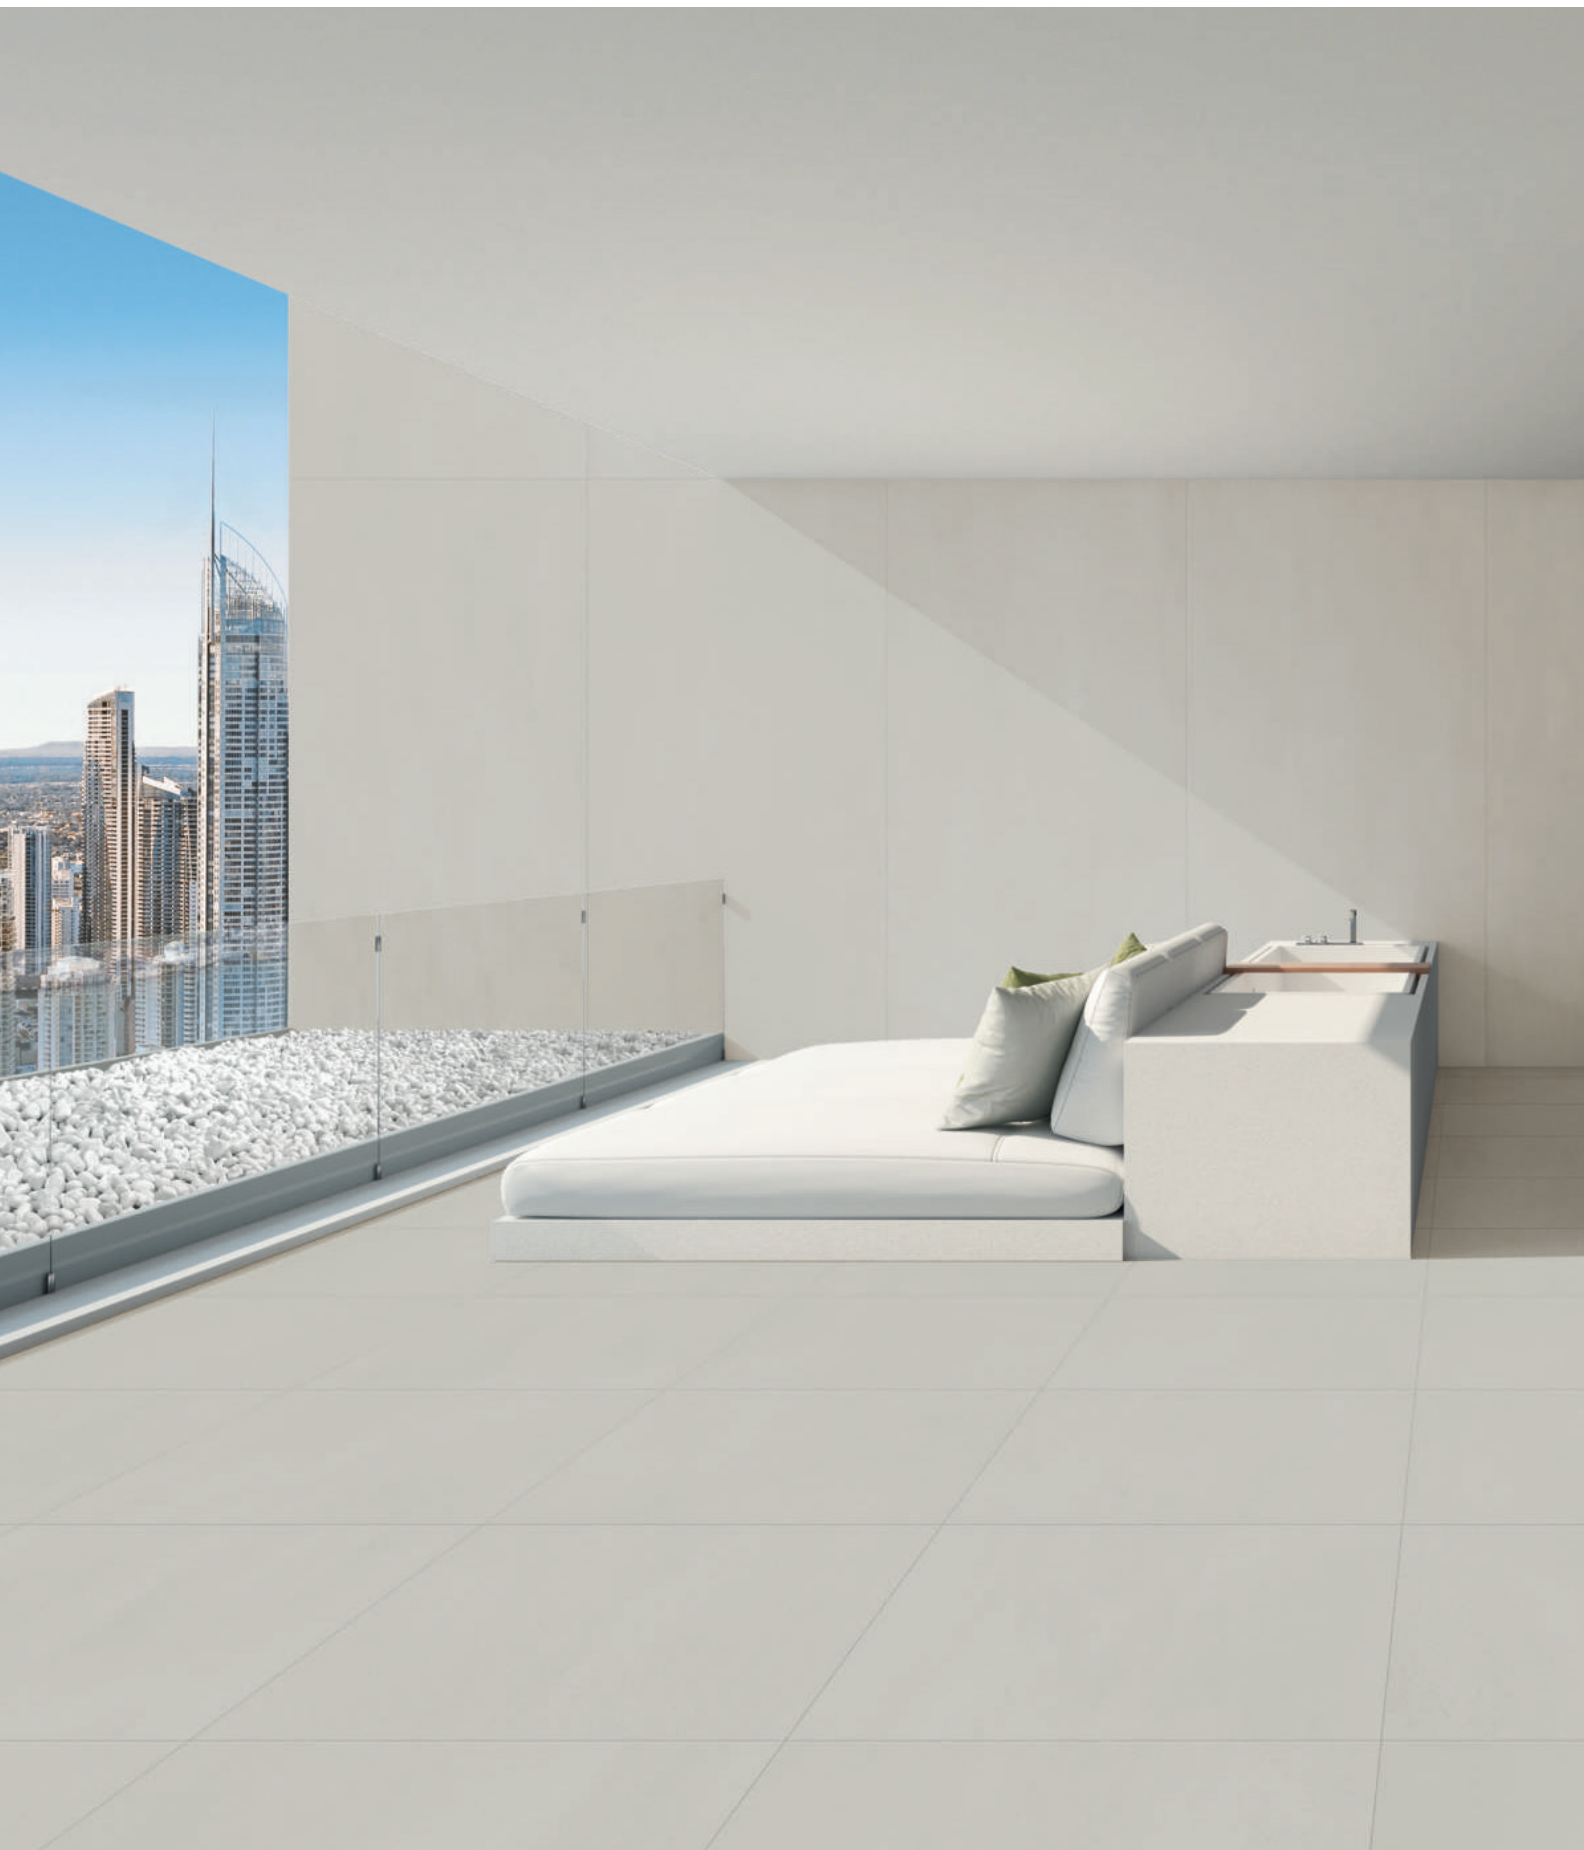

24"x24" Field Tile in Block



24"x24" Field Tile in Path
24"x48" Field Tile in Dam



12"x24" | 24"x24" Field Tile in Block

48"x48" Field Tile in Yard



12"x24" | 24"x24" Field Tile in Sidewalk



2"x2" Mosaic in Sidewalk

AVAILABLE IN:

9mm Field Tiles

Rectified Edge

- 12"x24" Matte Finish
- 24"x24" Matte Finish
- 24"x48" Matte Finish*
- 48"x48" Matte Finish*

6mm Slabs

Rectified Edge

- 48"x110" Matte Finish**

*Not available in Block

**Only available in Yard

- All sizes are NOMINAL

Outdoor Pavers

Only available in Sidewalk | Yard


- 24"x24" Grip Finish
- 36"x36" Grip Finish
- 48"x48" Grip Finish

Mosaic

- 2"x2" Mosaic Matte Finish

Trim Piece

- 3"x24" Bullnose Matte Finish




MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"
		BRICKS		DIAMONDS	
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"	OCTAGONS			1 1/8" 2"
	Chevron 2" x 12" 6" x 24"		2" w/ 0.6" Squares		
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4" x 2 1/2" w/ 5/8" Dot		1" x 1" 1 3/8" x 1 3/8" 2" x 2" 3" x 3"		1" x 2" 1" x 4"

*Other sizes available upon request



Dam




Sidewalk



Block



Yard




Path

Colors shown may vary from actual product. Final selection should be made from actual product samples.


2"X2" MOSAIC



CODE
Color Body Porcelain Tile

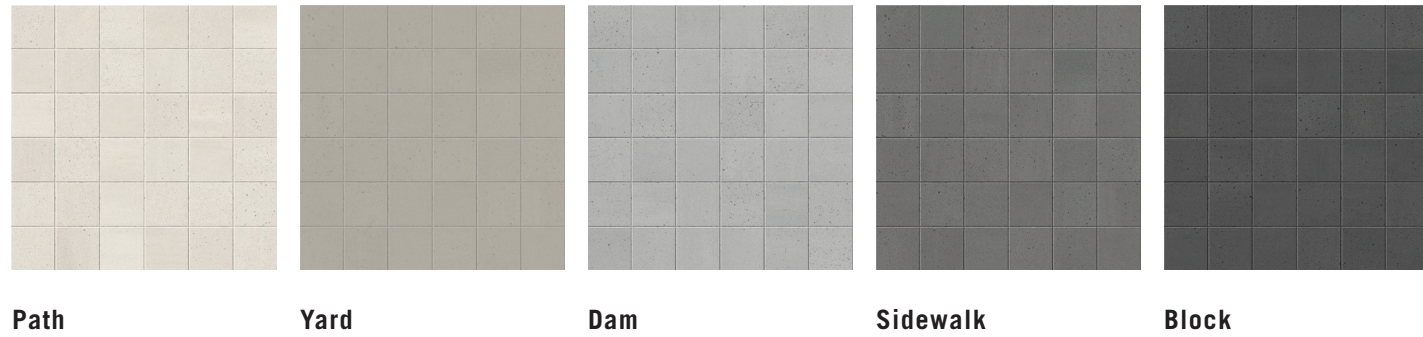

12"x24" Field Tile in Block
24"x24" | 24"x48" Field Tile in Dam

Features	Test Method	Value	
		9mm	20mm
Size	ISO 10545-2	Comply	
Water Absorption	ISO 10545-3	≤ 0.1%	
Bending Strength	ISO 10545-4	Comply	N/A
Breaking Strength		≥ 1300 N	> 10,000 N
Impact Resistance	ISO 10545-5	≥ 0.80	-
Abrasion Resistance	ISO 10545-6	< 145 mm ³	
Coefficient of Linear Thermal Expansion	ISO 10545-8	7x10 ⁻⁶ °C ⁻¹	
Thermal Shock Resistance	ISO 10545-9	Comply	
Expansion in Humidity	ISO 10545-10	Comply	
Frost Resistance	ISO 10545-12	Resistant	
Chemical Resistance	ISO 10545-13	Resistant	
Stain Resistance	ISO 10545-14	Cleanable	
Slip Resistance	DIN 51130	Comply	
Recycled Material	-	30% - Block 20% - Sidewalk Yard Dam	
Static Load	EN 12825	-	Center: KN > 7 Side Center: KN > 5 Diagonal: KN > 8
Breaking Load	EN 1339	-	U11 T11
 This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.			

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Matte Finish
- 6mm | 9mm | 20mm Thickness
- Rectified Edge
- V1 - Uniform Appearance
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com