DYNASTY









2″x2″ Mosaic in Oniciata Grey 12″x24″ Field Tile in Oniciata Grey 3" Hexagon Mosaic in Volkas Silk 12"x24" Field Tile in Volkas Silk

AVAILABLE IN:

8mm Field Tiles

Rectified Edge

8″x24″ Polished Finish 12"x24" Matte | Polished Finish* 24"x24" Matte | Polished Finish*

10mm Field Tile

Rectified Edge

24"x48" Matte | Polished Finish

Mosaics

2"x2" Mosaic Matte | Polished Finish Hexagon Mosaic Matte | Polished Finish 3″

Trim Piece

3″x12″ Bullnose *Matte* | *Polished Finish*



Volkas Silk



Oniciata Ivory



Marmo Nero

*Matte Finish Only Available in Pressed Edge

- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1³/8″x3″ 2″x4″
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1″ minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4″			* \\$ \\$ \>	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
A Hexagon	6"		2″		411.11
Chevron	2"x12" 6"x24"		z w/ 0.6″ Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ /2" w/ ⁵ /8" Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

*Other sizes available upon request



Carrara White



Oniciata Grey



2"X2" MOSAIC









Marmo Nero

3" HEXAGON MOSAIC



Volkas Silk



Carrara White

Carrara White



Oniciata Ivory

Oniciata Ivory




Oniciata Grey



Oniciata Grey

Marmo Nero

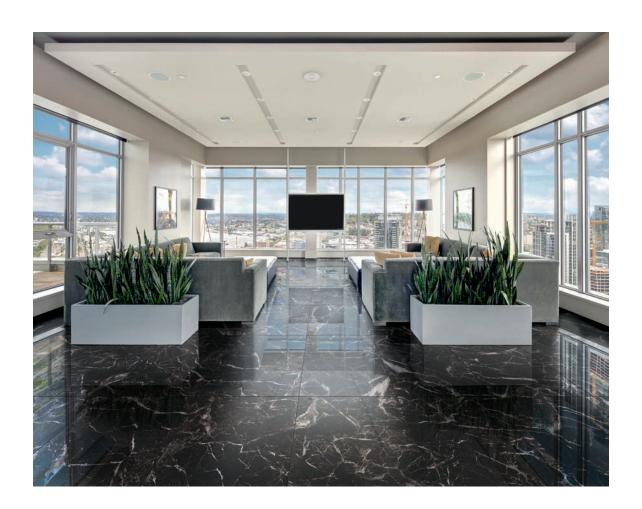

Features	Test Method	Value	
Water Absorption	ASTM C373	≤ 0.4%	
Warpage Edge	ACTN 4 0405	≥± 0.4% ≥± 0.5%	
Warpage Diagonal	ASTM C485	≥± 0.4% ≥± 0.5%	
Thickness	ASTM C499	≤ 0.04 in	
Wedging	ASTM C502	≥± 0.25%	
Breaking Strength	ASTM C648	8mm ≥ 300 lb/ft² 10mm ≥ 400 lb/ft²	
Chemical Resistance	ASTM C650	Not Affected	
Freeze Resistance	ASTM C1026	Resistant	
Stain Resistance	ASTM C1378	Not Affected	
D.C.O.F. Acu Test	ANSI A326.3	≥ 0.42%	
Recycled Content	-	Matte: ≥ 60% Polished: ≥ 40%	



GENROSE

RD[®] certified and will contribute to USGBC regis I his p tered LEED projects It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile •
- Matte | Polished Finish •
- 8mm | 10mm Thickness ٠
- Rectified | Pressed Edge •
- PEI Rating = 4 •
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com