







47"x10" | 24"x48" | 24"x24" Field Tile in Caravaggio Gold 24"x48" Field Tile in Emotion

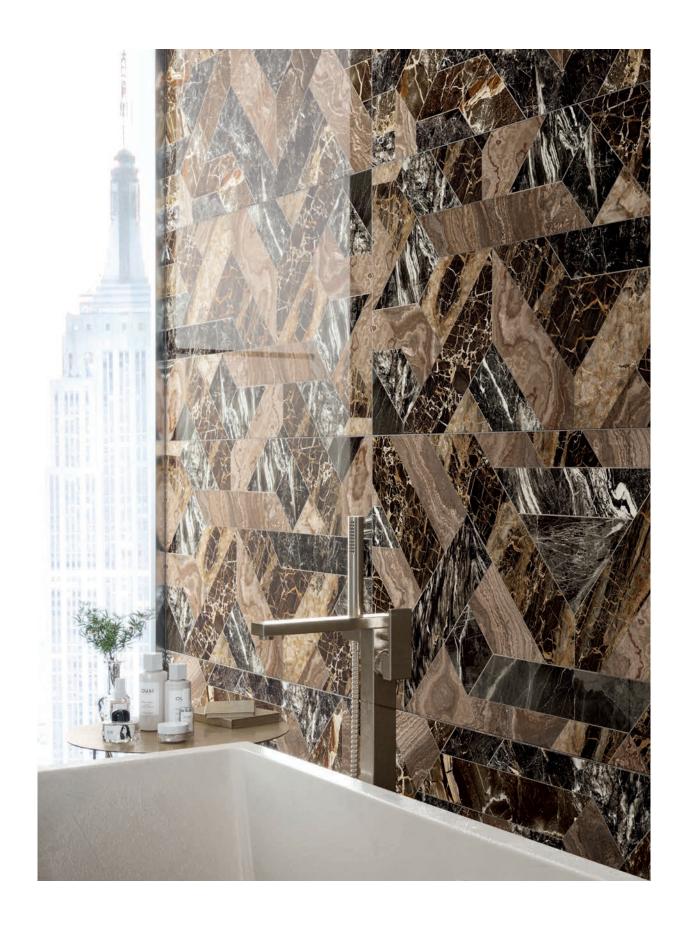

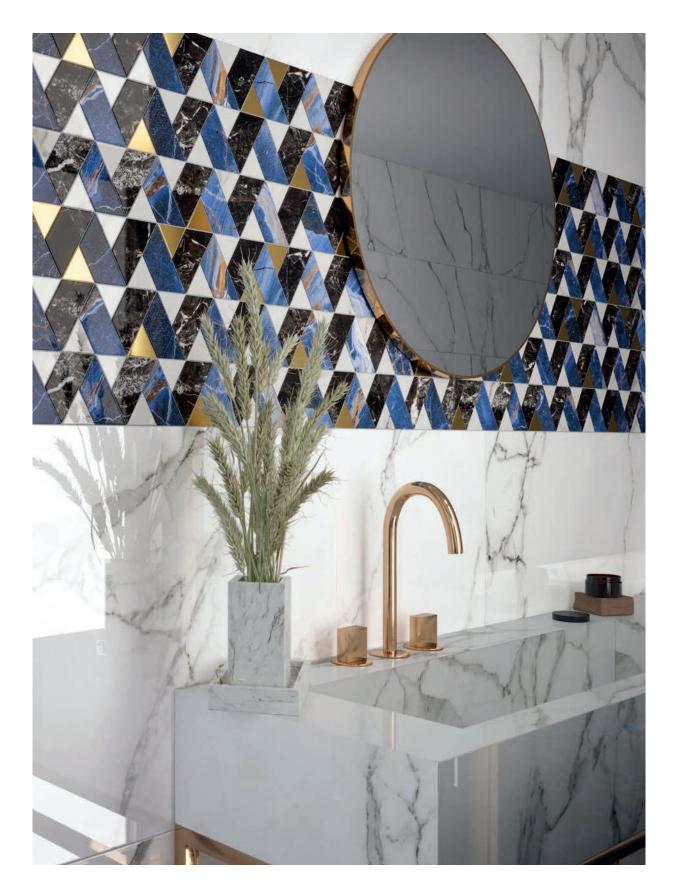

12"x13.5" Mood Mosaic in Blue 24"x48" Field Tile in White Beauty



12"x12.6" Brick Mosaic in Brown 24"x48" Field Tile in Emotion



24"x48" Deco Tile in Outline Cold 24"x48" | 24"x24" Field Tile in Allure

AVAILABLE IN:

7mm Slab Decos

48"x103" Polished Finish* 24"x48" Deco Polished Finish

7mm Field Tiles Trim Pieces

24"x48" Polished | Natural Finish** 13"x48" Step 24"x24" Polished | Natural Finish** 13"x48" Corner Step

2"x24" Bullnose


Mosaics

12"x12.6" Sheet Brick Mosaic Polished Finish
12"x13.5" Sheet Mood Mosaic Polished Finish

- All sizes are nominal

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

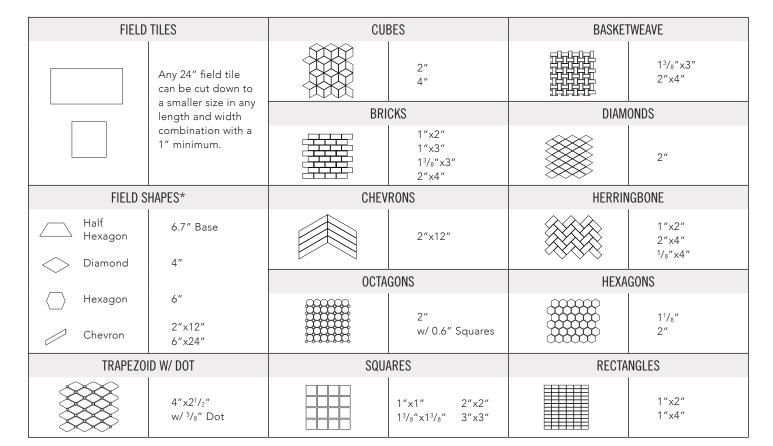



^{*}Only Available in: Caravaggio Gold | White Beauty | Dark Wave | Fantasy

^{**}Natural Finish Only Available in: White Fun | White Beauty | Emotion

^{*}Other sizes available upon request

24"X48"DECOS





Outline Dark



Outline White






Outline Blue

Outline Cold

BRICK MOSAICS







Brown

Dark

Universe

MOOD MOSAICS





Gold

Blue





Features	Test Method	Value	
		7 cm ≤ N ≤ 15 cm	N ≥ 15 cm
Sides		± 0.9 mm	± 0.6 % (± 2.0 mm)
Thickness		± 0.5 mm	± 5.0 % (± 0.5 mm)
Straightness of Sides	ISO 10545-2	± 0.75 mm	± 0.5% (± 1.5 mm)
Rectangularity		± 0.75 mm	± 0.5% (± 2 mm)
Surface Flatness		± 0.75 mm	± 0.5 % (± 2.0 mm)
Water Absorption	ISO 10545-3	≤ 0.1%	
Flexion Resistance	ISO 10545-4	$S \ge 700 \text{ N} \le 7 \text{ mm}$ $S \ge 1300 \text{ N} \ge 7 \text{ mm}$ $R \ge 35 \text{ N/mm}^2$	
Impact Resistance	ISO 10545-5	> 0.80	
Coefficient of Linear Thermal-Expansion	ISO 10545-8	$\alpha = 6.7 \times 10 - 6^{\circ}/C^{\circ}$	
Resistance to Thermal Shocks	ISO 10545-9	Resistant	
Moisture Expansion (In mm/m)	ISO 10545-10	Max 0.1 mm / m	
Frost Resistance	ISO 10545-12	Resistant	
Chemical Resistance	ISO 10545-13	B Min	
Resistance to Stains	ISO 10545-14	Class 3 Min	
Lead and Cadmium Discharge	ISO 10545-15	< Than Instrument Limit	
Skid Resistance	ANSI A 137.1	Natural = > 0.42 Polished = N/A	
Recycled Material	-	>20%	
Indoor Environmental Quality	-	No VOCs Emission	

According to ANSI and MIA standards. depending on the type and size of tile. it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Polished | Natural Finishes
- 7mm Thickness
- Rectified Edge
- PEI Rating = 2 (Dark Wave | Outline Dark | Caravaggio Gold) 3 (All Other Colors)



• Frost Resistance = Yes





www.genrose.com