

HARD LEATHER








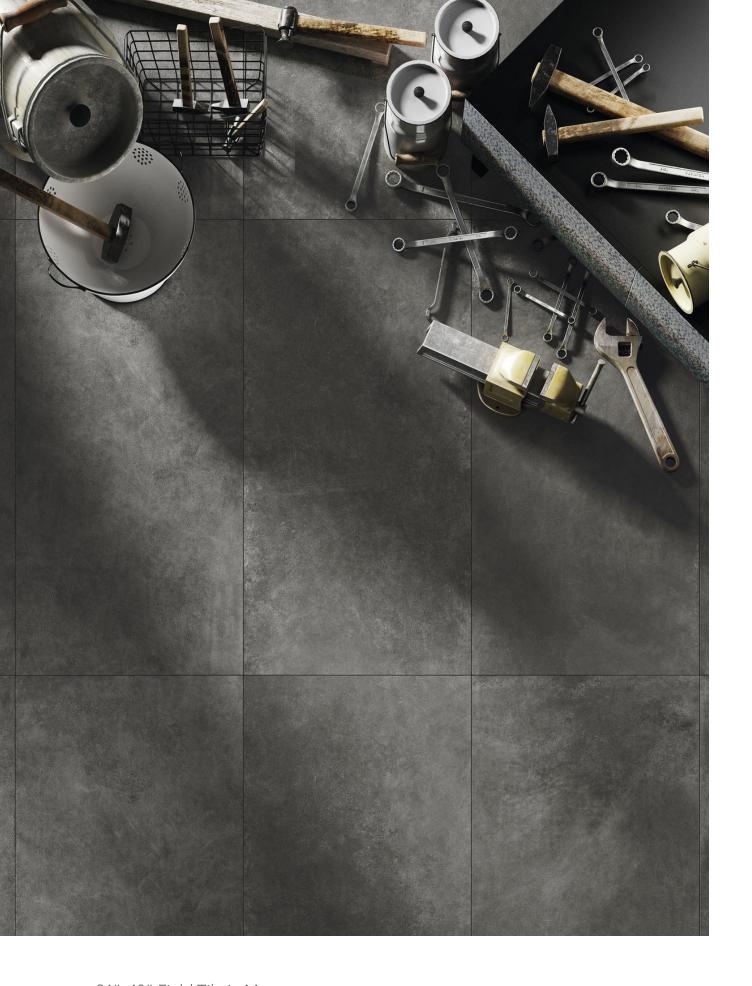


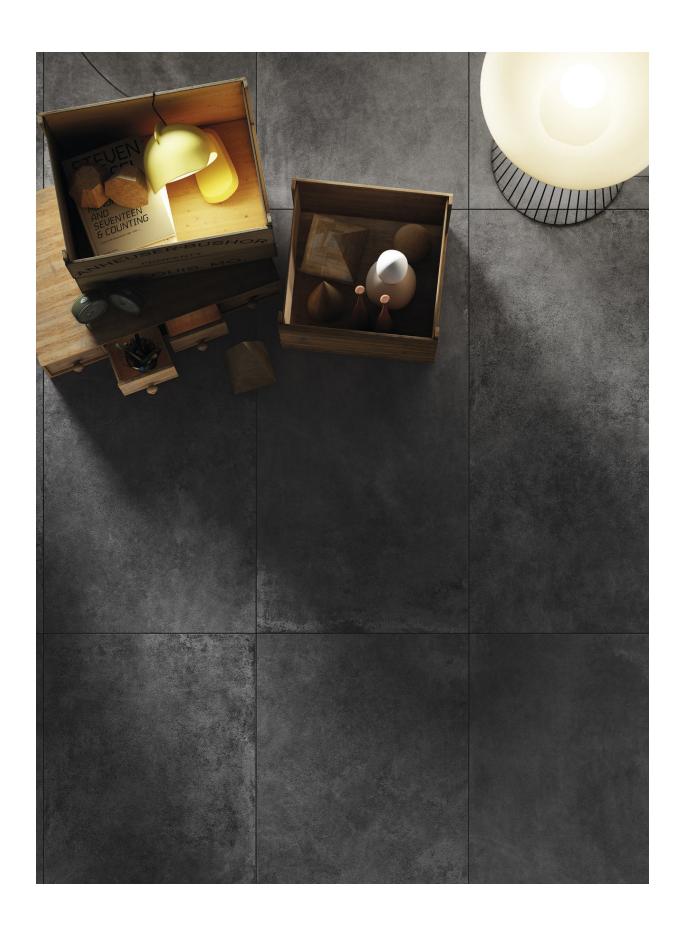

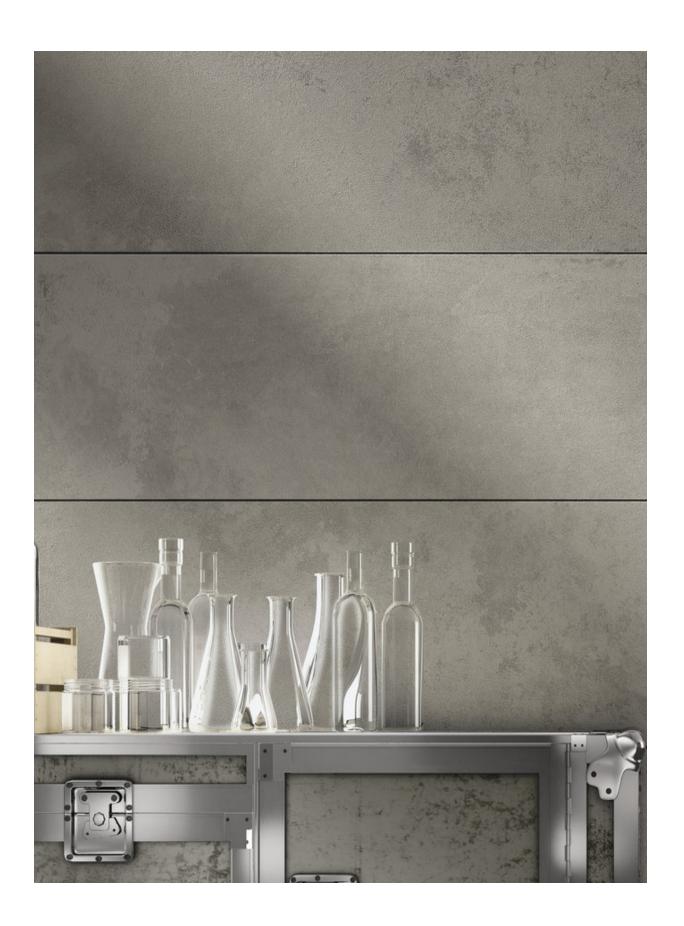



24"x48" Field Tile in Slate

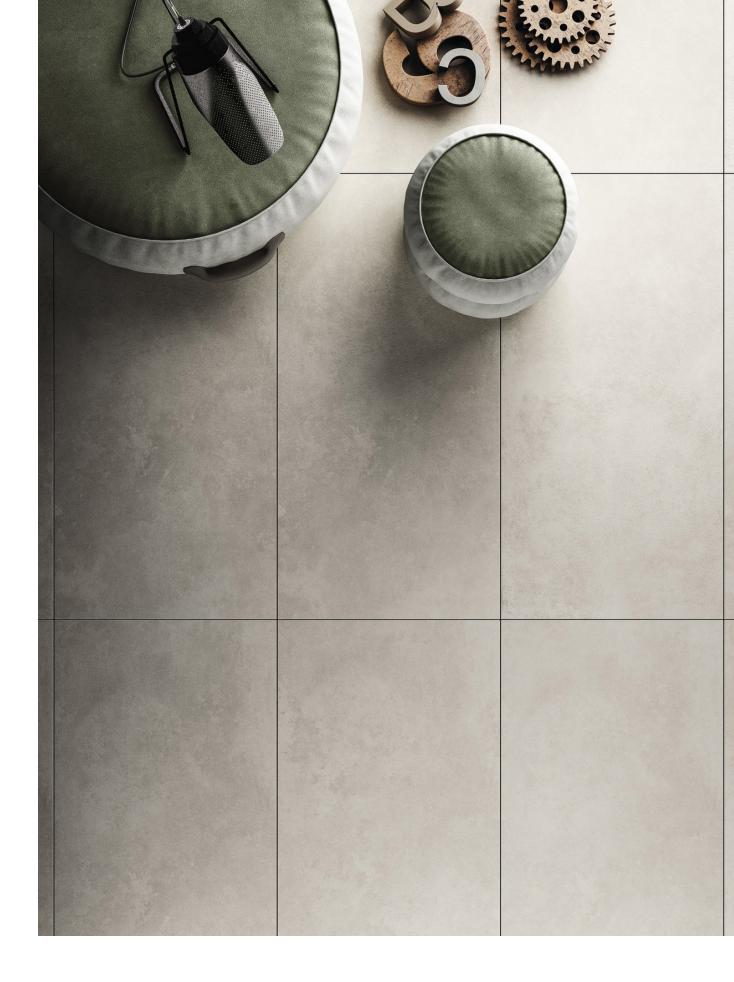

AVAILABLE IN:

9mm Field Tiles

8"x48" Nautral | Polished | Anti-Slip Finish*
12"x24" Polished | Anti-Slip Finish
12"x48" Natural | Polished | Anti-Slip Finish*
24"x24" Natural | Polished | Anti-Slip Finish
24"x48" Natural | Polished | Anti-Slip Finish*

Trim Piece

3.5"x24" Bullnose Polished Finish



Mosaics

1"x1" Mosaic Natural Finish 1"x12" Mosaic Natural Finish 2"x2" Mosaic Anti-Slip Finish

MADE TO ORDER FIELD TILES AND MOSAICS:


This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1 ³ / ₈ "x3" 2"x4"
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
	4"			* > > >	⁵ / ₈ "×4"
		OCTAGONS		HEXAGONS	
\ \ \ Hexagon	6"		2"		1 ¹ / ₈ "
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

^{*}Other sizes available upon request

^{*}Rectified Edge


⁻ All sizes are NOMINAL



Ivory



Moss



Dark




Slate



Tobacco


1"X1" MOSAIC

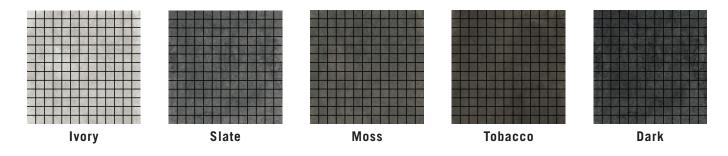

1"X12" MOSAIC



2"X2" MOSAIC

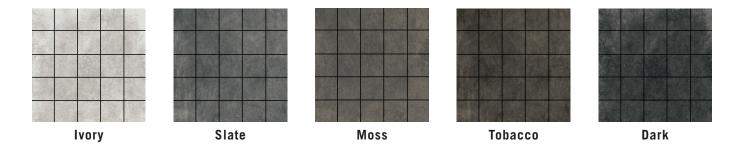



HARD LEATHERColor Body Porcelain Tile

Features	Test Method	Value	
Length and Width		± 0.2%	
Thickness		± 5%	
Warpage of Edges	ISO 10545-2	± 0.2%	
Wedging		± 0.2%	
Warpage		± 0.2%	
Water Absorption	ISO 10545-3	≤ 0.1%	
Don't a Change	100 40545 4	R ≥ 50 N/mm²	
Bending Strength	ISO 10545-4	S > 1700 N	
Coefficient of Linear Thermal Expansion	ISO 10545-8	6.5x10 ⁻⁶ °C ⁻¹	
Thermal Shock Resistance	ISO 10545-9	Guaranteed	
Frost Resistance	ISO 10545-12	Frost-Proof	
Chemical Resistance	ISO 10545-13	GB Min.	
Stain Resistance	ISO 10545-14	Class 3 Min.	
Slip Resistance	DIN 51130	Natural R10	Anti-Slip R11
Recycled Content	-	> 40%	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Natural | Polished | Anti-Slip Finish
- 9mm Thickness
- Rectified Edge
- V2 Slight Shading Variation
- Frost Resistance = Yes





www.genrose.com



www.genrose.com