

LUXORO





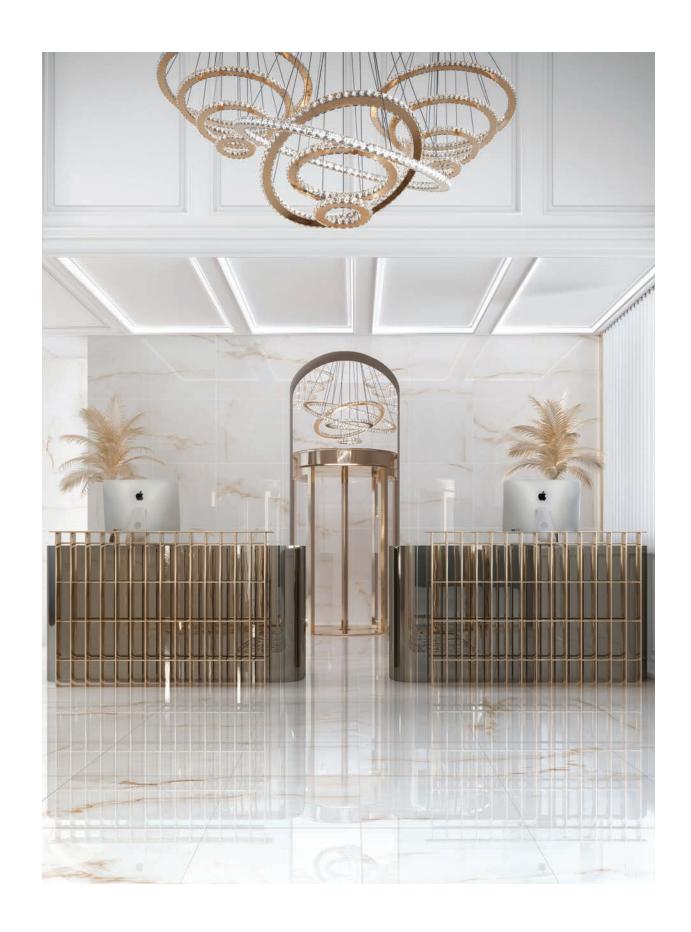


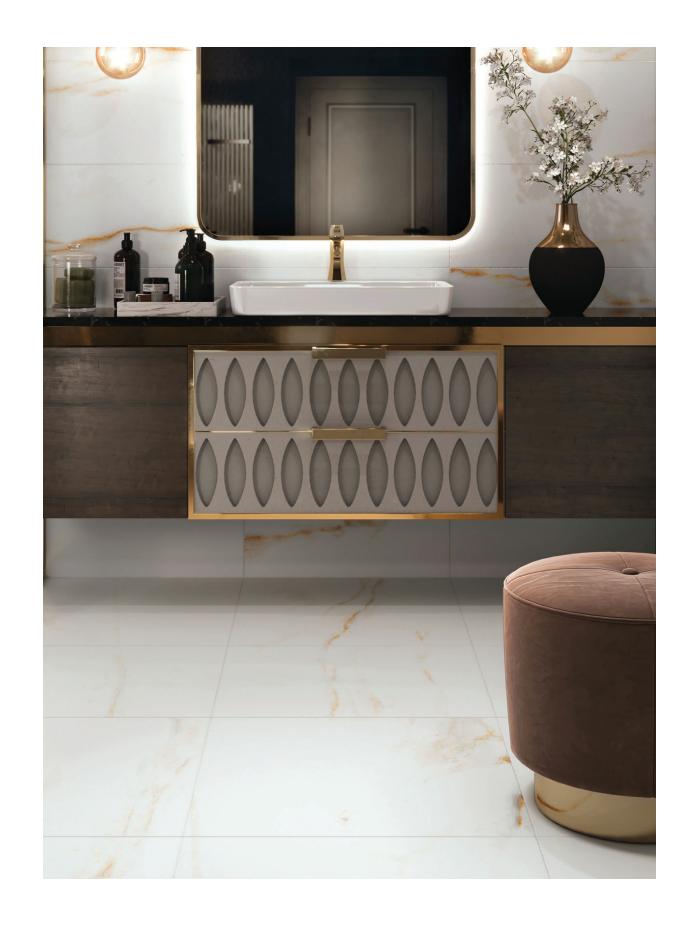

24"x24" Field Tile in Covelano Oro



24"x24" Field Tile in Macchia Vecchia 24"x24" White Deco Tile

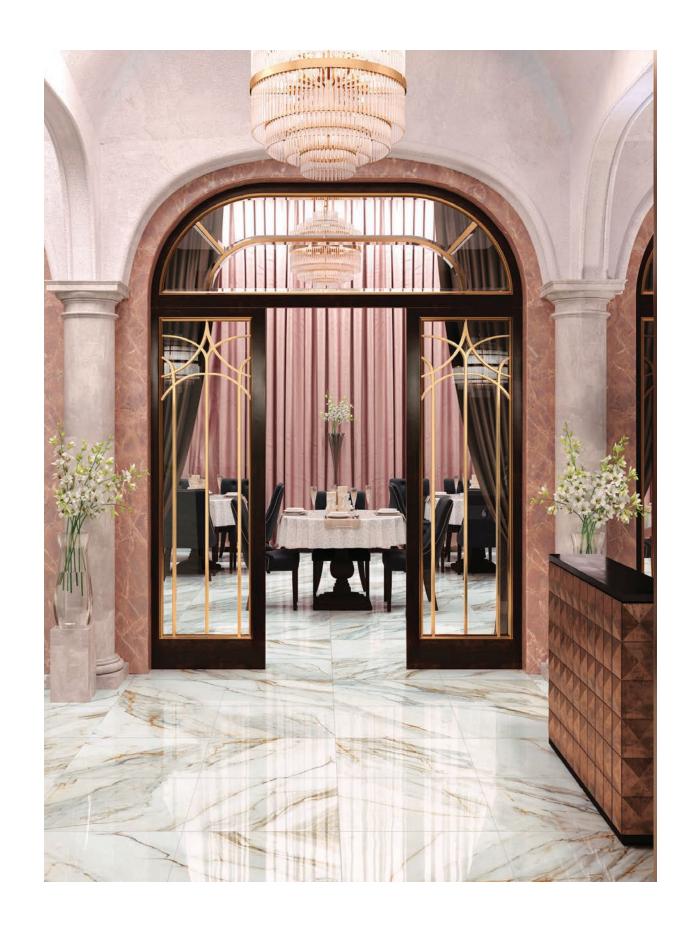



24"x24" Field Tile in Macchia Vecchia

AVAILABLE IN:

9mm Field Tile

Rectified Edge

24"x24" Polished Finish

- All sizes are NOMINAL

9mm Decos

Rectified Edge

24"x24" White Deco Polished Finish

24"x48" White Deco | Black Deco Polished Finish

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/₅"x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" ⁵ / ₈ "x4"
Diamond	4"	0.074	OONG	LIEVA.	
Hexagon 6"		OCTAGONS		HEXAGONS	
Hexagon Chevron	2"x12" 6"x24"		2" w/ 0.6" Squares		1¹/ ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"







Covelano Oro


Macchia Vecchia



Saint Laurent

DECOS








24"x48" White Deco



24"x48" Black Deco

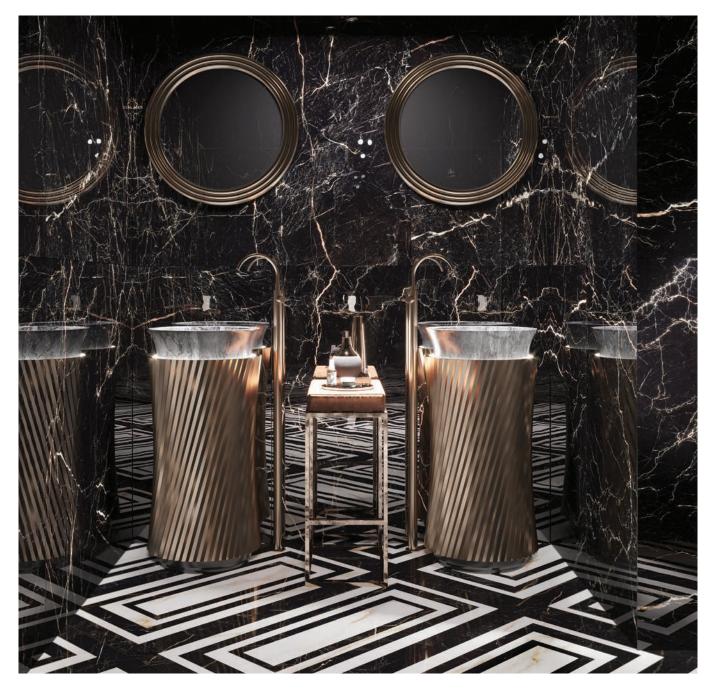

24"x24" Field Tile in Saint Laurent 24"x48" Black Deco



LUXOROColor Body Porcelain Tile

Features	Test Method	Value	
Length and Width		± 0.3% MAX ± 1mm	
Thickness		± 5% MAX ± 0.5mm	
Squareness of Corners	ISO 10545-2	± 0.3% MAX ± 1.5mm	
Straightness of Sides		± 0.3% MAX ± 0.8mm	
Planarity		± 0.4% MAX ± 1.8mm	
Water Absorption	ISO 10545-3	≤ 0.5%	
Breaking Strength	100 10515 1	S ≥ 1300 N	
Bending Resistance	ISO 10545-4	R ≥ 35 N/mm ²	
Surface Abrasion	ISO 10545-6	4 (All Other Colors) 5 (Black Deco Saint Laurent)	
Thermal Shock Resistance	ISO 10545-9	Resistant	
Frost Resistance	ISO 10545-12	Resistant	
Resistance to Household Chemicals and Swimming Pool Additives	ICO 10F4F 12	А	
Resistance to Low Concentrations of Acids and Alkali	ISO 10545-13	LA	
Stain Resistance	ISO 10545-14	5	
Recycled Content	-	18%	
This	product is certified by Bureau Ve	eritas.	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.







- Color Body Porcelain Tile
- Polished Finish
- 9mm Thickness
- Rectified Edge
- PEI Rating = 4 (All Other Colors) | 5 (Black Deco | Saint Laurent)
- V2 Slight Shading Variation
- Frost Resistance = Yes





www.genrose.com