
# **MANSION**







12"x12" Basketweave Mosaic in Daino w/ Fossena Dot

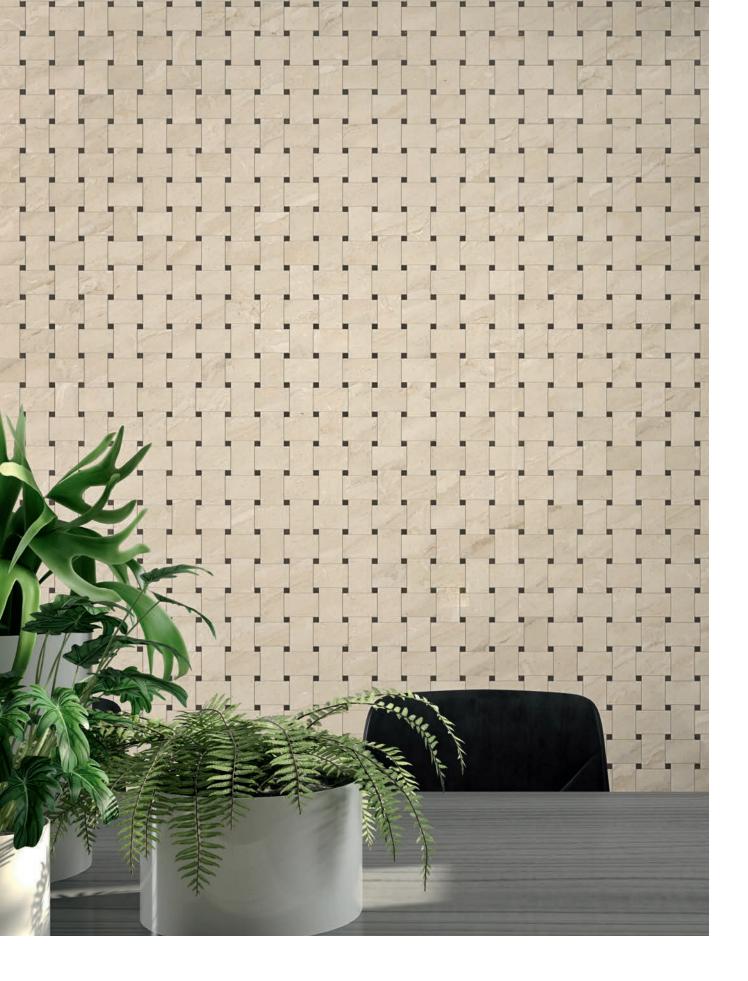

12"x24" Field Tile in Black Mirror

## **AVAILABLE IN:**

### 10mm Field Tiles

Rectified Edge

12"x12" Matte Finish

12"x24" Matte | Polished Finish

### Mosaics

1"x1" Mosaic Polished Finish 2"x2" Mosaic Matte Finish

12"x12" Basketweave Mosaic Matte Finish

#### **Trim Piece**

2.5"x24" Bullnose Matte | Polished Finish



- All sizes are NOMINAL

### MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.


FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1³/ <sub>8</sub> ″x3″ 2″x4″
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"				
		OCTAGONS		HEXAGONS	
\ \ \ \ Hexagon	6"		2,1		411.11
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

<sup>\*</sup>Other sizes available upon request






Colorado Daino

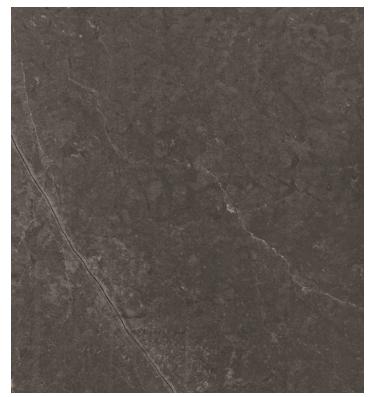




Fossena Black Mirror

# 1"X1" MOSAIC









Fossena

**Black Mirror** 

# 2"X2" MOSAIC









Fossena Black Mirror

# 12"X12" BASKETWEAVE MOSAIC









Features	Test Method	Value	
reatures	rost motilou	Polished	Matte
Length and Width		± 0.5% ± 2mm	± 0.5% ± 2mm
Thickness		± 0.5% ± 2mm	± 0.5% ± 2mm
Straightness of Sides	ISO 10545-2	± 5% ± 0.6mm	± 5% ± 0.5mm
Rectangularity		± 0.3% ± 1.5mm	± 0.3% ± 1.5mm
Surface Flatness		± 0.3% ± 1.5mm	± 0.3% ± 1.5mm
Surface Flatiless	ASTM C 485	Warpage Diagonal/Edge ±0.4%	
Water Absorption	ISO 10545-3	≤ 0.1% Bla GL	
Bending Strength	ISO 10545-4	≥ 35 N/mm²	
Abrasion Resistance	ISO 10545-7	Class 3 (Fossena, Black Mirror) Class 4 (Colorado, Daino)	
Crazing Resistance	ISO 10545-11	Resistant	
Frost Resistance	ISO 10545-12	Resistant	
Chemical Resistance	ISO 10545-13	Class A	
Acid and Base Resistance	150 10343-13	Class LA	Class LA - HA
Stain Resistance	ISO 10545-14	Class 5	
Scratch Hardness (Mohs)	EN 101	> 6	
	DIN 51097	-	Class B
Clin Desistance	DIN 51130	-	R10
Slip Resistance	B.C.R.A. REP. CEC. 6/81	-	$0.40 \le \mu \le 0.74$
	DCOF ACU TEST	-	WET > 0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Glazed Porcelain Tile
- Matte | Polished Finish
- 10mm Thickness
- Rectified Edge
- V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com