

MARA

 GENROSE





30"x60" | 15"x60" Field Tile in Blanco



10"x20" Wave Deco in Blanco



10"x20" Wall Tile in Grigio
10"x20" Concept Deco in Grigio



10"x20" Wall Tile in Onix Gris
10"x20" Concept Deco in Onix Gris



30"x30" Field Tile in White



12"x36" Wall Tile in White
30"x30" Field Tile in White

AVAILABLE IN WHITE:

Field Tile

30"x30" Matte | Glossy | Silk Finish
 15"x30" Matte | Glossy | Silk Finish
 24"x24" Matte | Glossy Finish
 12"x12" Matte Finish

Mosaic

2"x2" Mosaic Matte Finish

Wall Tile + Deco

16"x48" Matte | Glossy | Silk Finish
 12"x36" Matte | Glossy | Silk Finish
 12"x24" Matte | Glossy Finish
 10"x20" Glossy Finish
 10"x20" Wave Deco Glossy Finish

Trim Pieces

15"x30" Step Matte | Glossy | Silk Finish
 15"x30" Stairtread Matte | Glossy | Silk Finish
 3"x12" Bullnose Matte | Glossy | Silk Finish
 10" Quartino Glossy Finish

AVAILABLE IN GRIGIO AND ONIX GRIS:

Field Tile


12"x12" Matte Finish

Wall Tile + Deco

10"x20" Glossy Finish
 10"x20" Concept Deco Glossy Finish

- All sizes are NOMINAL

WAVE DECO



White

Blanco

AVAILABLE IN BLANCO:

Field Tile

30"x60" Matte Finish
 15"x60" Matte Finish
 30"x30" Glossy Finish
 15"x30" Glossy Finish
 24"x24" Matte | Glossy Finish
 12"x12" Matte Finish

Mosaic

2"x2" Mosaic Matte Finish

Wall Tile + Deco

12"x36" Matte | Glossy Finish
 12"x24" Matte | Glossy Finish
 10"x20" Glossy Finish
 10"x20" Wave Deco Glossy Finish

Trim Pieces


15"x60" Step Matte Finish
 15"x60" Stairtread Matte Finish
 15"x30" Step Matte | Glossy Finish
 15"x30" Stairtread Matte | Glossy Finish
 3"x30" Bullnose Matte | Glossy Finish
 3"x12" Bullnose Matte Finish
 10" Quartino Glossy Finish

Mosaic


2"x2" Mosaic Matte Finish

Trim Pieces

3"x12" Bullnose Matte Finish
 10" Quartino Glossy Finish



CONCEPT DECO




Blanco

Onix Gris

COLORS:



White

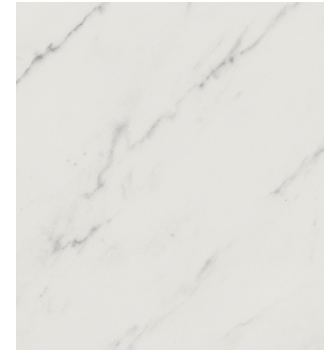

Blanco



Grigio



Onix Gris

Colors shown may vary from actual product. Final selection should be made from actual product samples.



MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE		
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"	
		BRICKS		DIAMONDS		
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"	
FIELD SHAPES*		CHEVRONS		HERRINGBONE		
	Half Hexagon	6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond	4"				
	Hexagon	6"	OCTAGONS		HEXAGONS	
	Chevron	2" x 12" 6" x 24"		2" w/ 0.6" Squares		1 1/8" 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES		
	4" x 2 1/2" w/ 5/8" Dot		1" x 1" 1 3/8" x 1 3/8" 3" x 3"		1" x 2" 1" x 4"	

*Other sizes available upon request

Features	Test Method	Value
Reaction To Fire	Decision 96/603/EEC amended	Class A1-A1fl
Water Absorption	ISO 10545-3	E > 0.5%
Breaking Strength	ISO 10545-4	≥ 1100 N
Adhesion with Cement Adhesive Type	-	Class C1: ≥ 1 N/mm ²
Slip Resistance*	-	(Exterior) ≥ Class 2 and/or ≥ R10 (Interior) Class 1 and/or R9
Thermal Shock Resistance	-	Resistant
External Use - Freeze-Thaw Resistance	ISO 10545-12	Resistant
Internal Use	-	All Colors and Finishes Comply
This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.		

*Slip Resistances value is for White Matte only. All other colors and finishes have No Performance Declared

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Features	Test Method	Value
Reaction To Fire	Decision 96/603/EEC amended	Class A1
Water Absorption	ISO 10545-3	E > 10%
Breaking Strength	ISO 10545-4	≥ 600 N
Adhesion with Cement Adhesive Type	-	Class C1: ≥ 0.5 N/mm ²
This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info for White:

- Glazed Porcelain Tile = Glossy Finish
- Color Body Porcelain Tile = Matte | Silk Finishes
- Matte | Glossy | Silk Finishes
- 8.2mm Thickness
- Pressed Edge
- PEI Rating = 5 (Matte Finish)
4 (Glossy | Silk Finishes)
- V3 - Moderate Variation
- Frost Resistance = Yes

Product Info for Blanco:

- Glazed Porcelain Tile = Glossy Finish
- Color Body Porcelain Tile = Matte Finish
- Matte | Glossy Finishes
- 8.2mm Thickness
- Pressed Edge
- PEI Rating = 5 (Matte Finish)
4 (Glossy Finish)
- V3 - Moderate Variation
- Frost Resistance = Yes

Product Info for Grigio | Onix Gris:

- Glazed Porcelain Tile
- Matte Finish
- 8.2mm Thickness
- Pressed Edge
- PEI Rating = 5
- V3 - Moderate Variation
- Frost Resistance = Yes

Product Info For Wall Tiles:

- Ceramic Tile
- Glossy Finish
- 8.2mm Thickness
- Pressed Edge
- V3 - Moderate Variation
- Frost Resistance = No





www.genrose.com