# **MARMOL**










12"x24" Field Tile in Crosscut Travertine

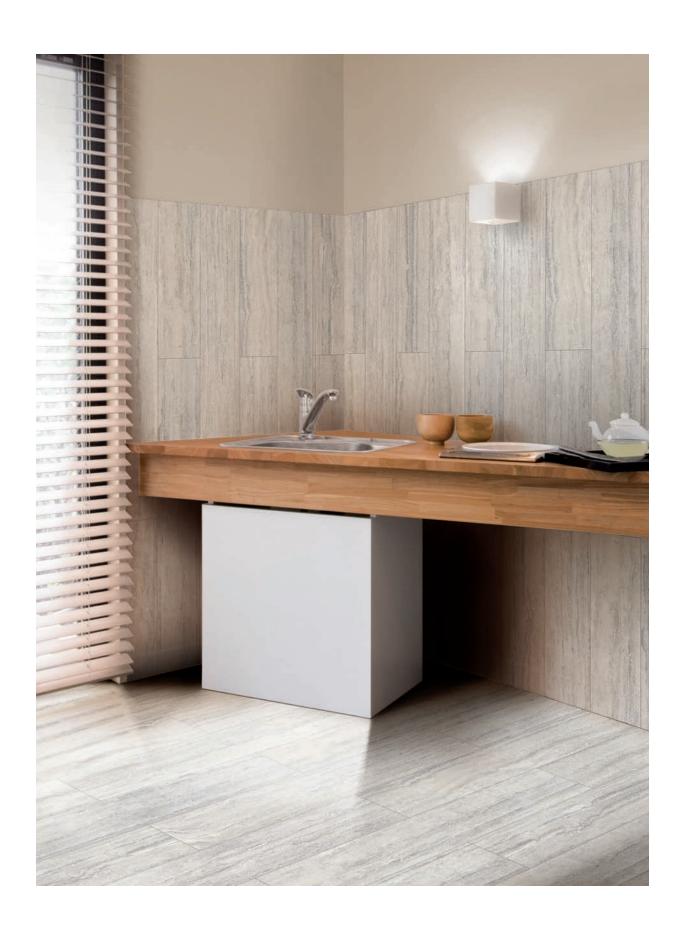





12"x24" Field Tile in Crosscut Travertine



### **AVAILABLE IN:**

#### Field Tiles

Rectified Edge

3"x6" Honed Finish 6"x6" Honed Finish 6"x12" Honed Finish 12"x12" Honed Finish 12"x24" Honed Finish

#### Mosaic

2"x2" Mosaic Honed Finish

- All sizes are NOMINAL

#### **Trim Piece**

3"x12" Bullnose Honed Finish



## MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"	ОСТА	GONS	HEXA	
Hexagon	6"	0017	2"		11/8"
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

<sup>\*</sup>Other sizes available upon request





Crema Marfil



Argento



Creme Brulee



**Crosscut Travertine** 



Grigio

## 2"X2" MOSAIC











Bianco

Creme Brulee

Crema Marfil

**Crosscut Travertine** 

Argento



Grigio





Features	Test Method	Value	
Water Absorption	ASTM C373	≤ 0.1%	
Bond Strength	ASTM C482	≥ 200 psi	
Warpage average	ASTM C485	≤ 0.40%	
Thickness Dimension	A CTNA C 400	≤ 0.04 in	
Facial Dimension	ASTM C499	≤ 0.25%	
Wedging Average	ASTM C502	≤ 0.25%	
Breaking Strength	ASTM C648	≥ 350 lbf	
Chemical Resistance	ASTM C650	Class A	
Frost Resistance	ASTM C1026	No evidence of damage	
Visible Abrasion Resistance for Glaze Tile	ASTM C1027	Class 4	
Stain Resistance	ASTM C1378	Class A	
Coefficient of Friction (Dynamic)	DCOF Acutest (WET) <sup>sm</sup>	≥ 0.42	
Aesthetic Classification	Visual Evaluation Shade & Texture	V2	
Deep Abrasion	ASTM C1243	< 150 mm²	
Hardness	MOHS	≥ 7	
Recycled Content	-	≥ 40%	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Glazed Porcelain Tile
- Honed Finish
- Rectified Edge
- PEI Rating = 5
- V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com