
MONTBLANC







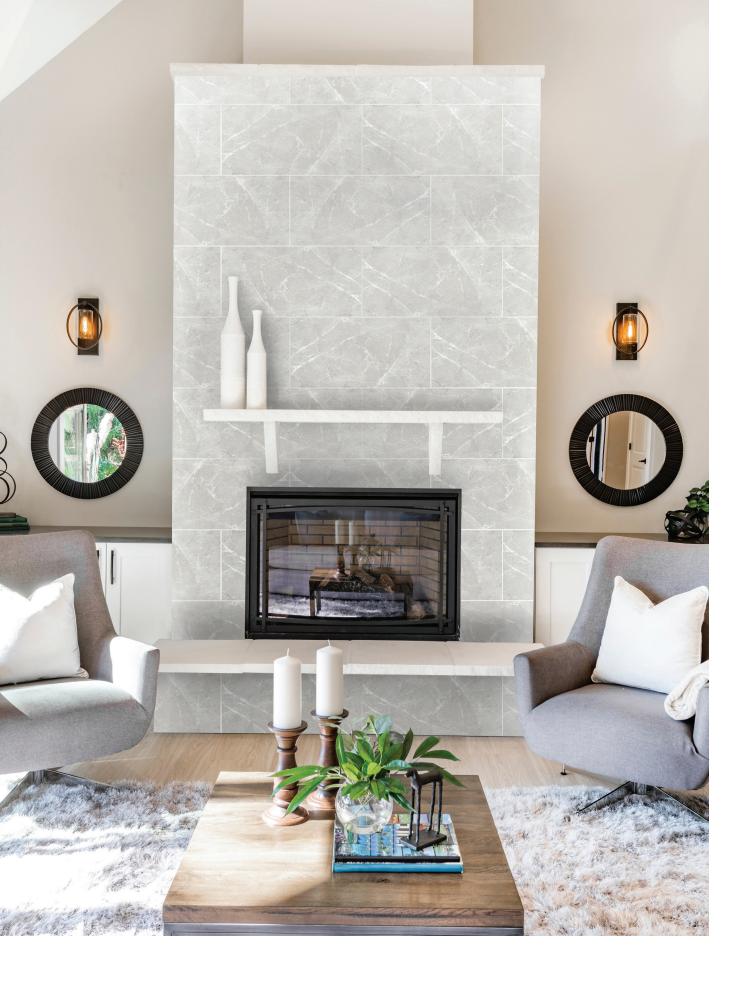

12"x24" Field Tile in Carrara

AVAILABLE IN:

9mm Field Tiles

Rectified Edge

Natural* | Polished Finish 4"x12" 12"x24" Natural | Polished Finish 24" x24" Natural* | Polished Finish 24″x48″ Natural | Polished Finish Natural | Polished Finish 48″x48″

Mosaics

2"x2" Mosaic Natural | Polished Finish Hexagon Mosaic Polished Finish

- All sizes are NOMINAL *Not Available in Aquamarine

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24″ field tile can be cut down to a smaller size in any		2" 4"		1³/₀″x3″ 2″x4″
	length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
🔿 Diamond	4″			*\Y\Y \>	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
	6"		2"		1 ¹ / ₈ "
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

Trim Piece

Battiscopa Polished Finish

2″x24″

Carrara



Aquamarine

*Other sizes available upon request



Zebrino


Supreme Grey



2"X2" MOSAIC



Carrara



Zebrino



Aquamarine



Supreme Grey

HEXAGON MOSAIC



Carrara



Zebrino



Aquamarine



Supreme Grey



GENROSE

Features	Test Method	Value	
Length and Width		± 0.6% MAX ± 2mm	
Straightness of Sides		± 0.5% MAX ± 1.5mm	
Corner Squareness	ISO 10545-2	± 0.5% MAX ± 2mm	
Flatness		± 0.5% ± 2mm	
Thickness		± 0.5% MAX ± 0.5mm	
Water Absorption	ISO 10545-3	≤ 0.5%	
Breaking Strength	ISO 10545-4	≥ 1300 N ≥ 7.5mm ≥ 700 N < 7.5mm	
Modulus of Rupture	150 10545-4	≥ 35 N/mm ²	
Coefficient of Linear Thermal Expansion	ISO 10545-8	7° MK (-1)	
Frost Resistance	ISO 10545-12	Resistant	
Resistance to Household Chemicals	ISO 10545-13	B MIN	
Stain Resistance	ISO 10545-14	3	
Color Stability	DIN 51094	Resistant	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Natural | Polished Finish
- 9mm Thickness
- Rectified Edge
- PEI Rating = 5
- V2 Slight Shading Variation
- Frost Resistance = Yes

MONTBLANC

Color Body Porcelain Tile



www.genrose.com



www.genrose.com