

# **NEWPORT**






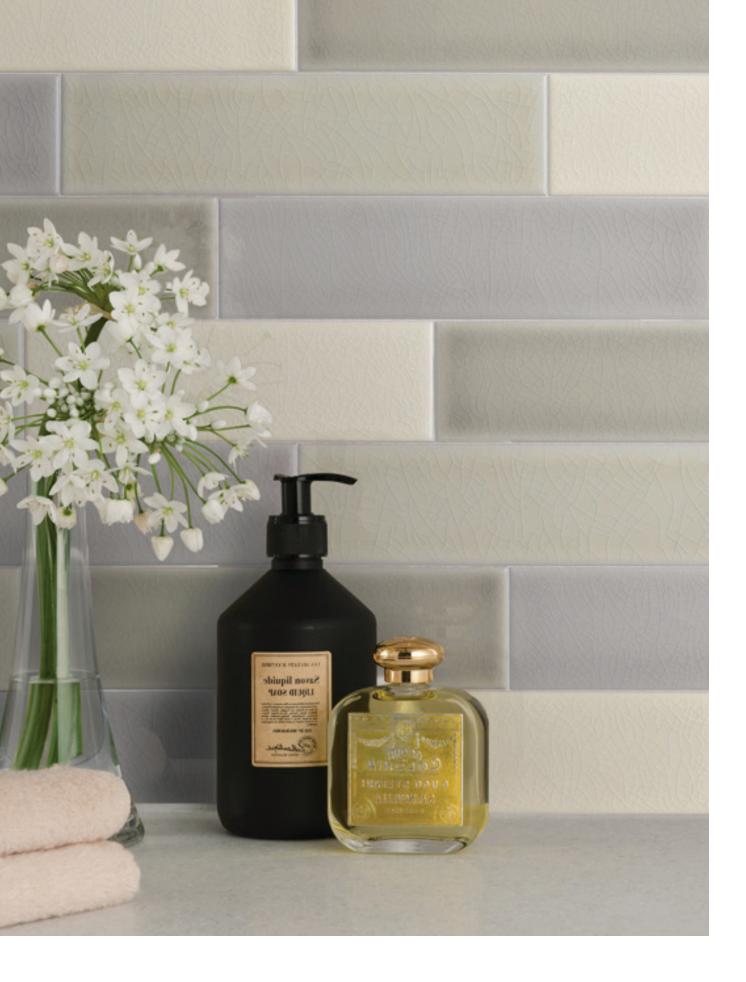


2.5"x10" Field Tile in Alabaster | Silver | Grey Stone

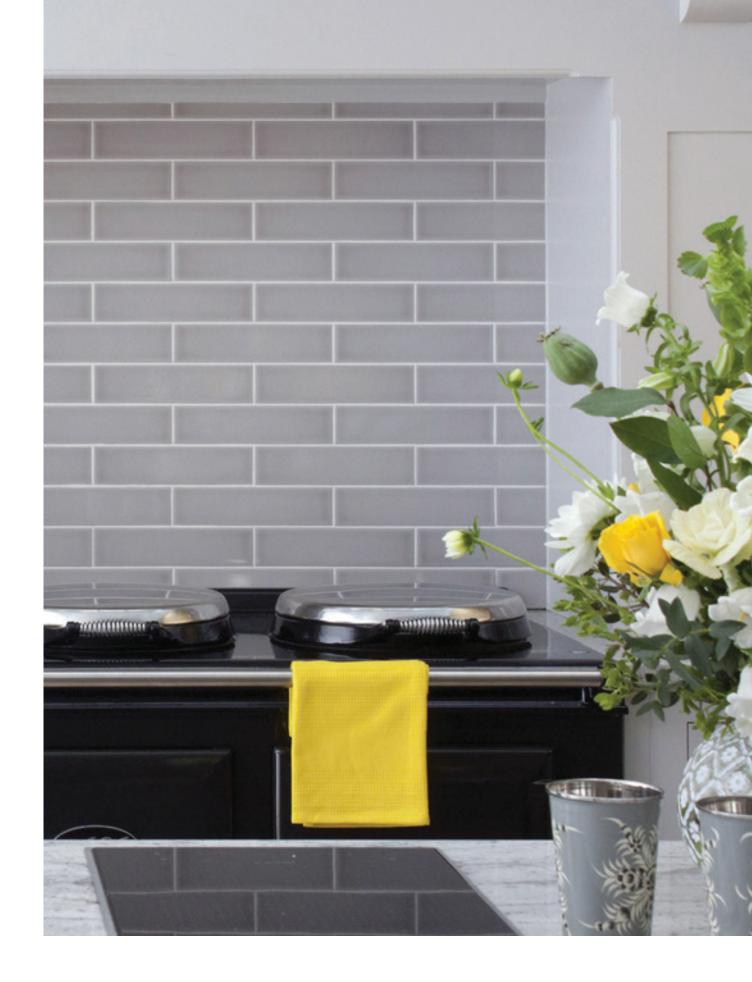

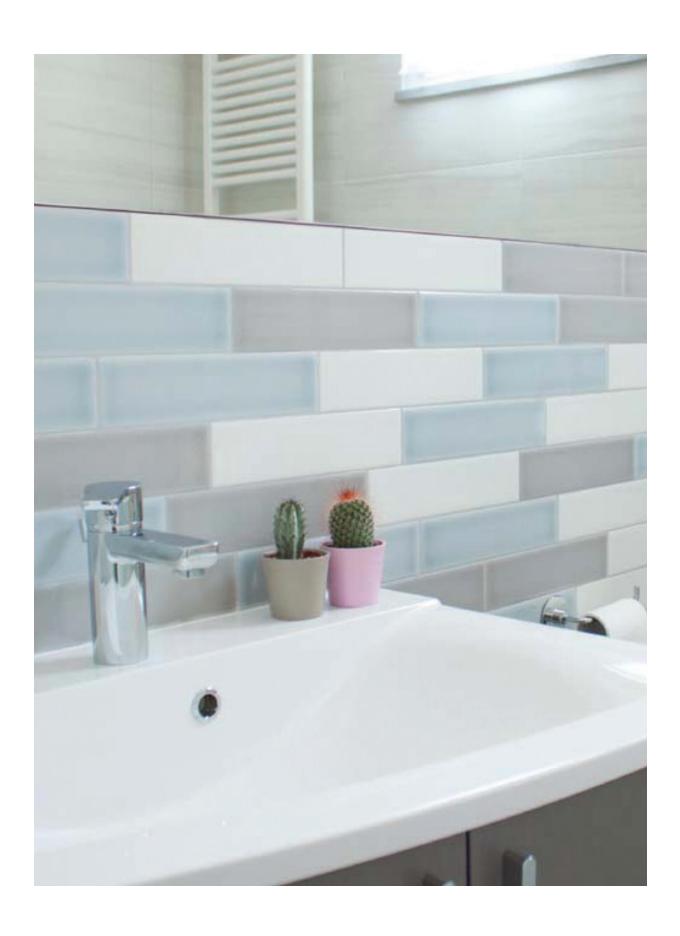

2.5"x10" Field Tile in White Moon | Grey Stone | Aqua

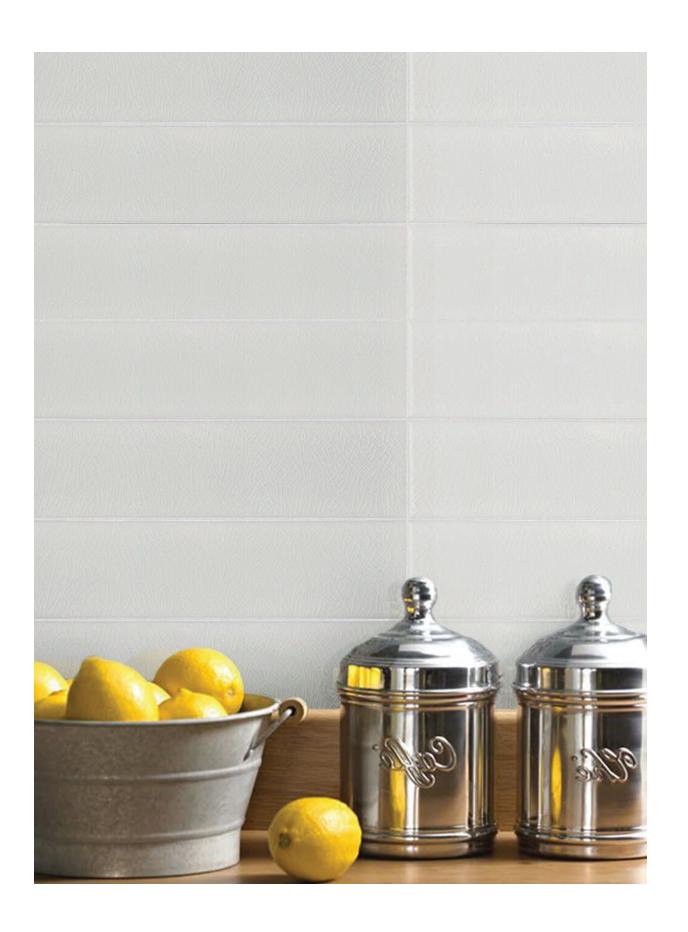

## **AVAILABLE IN:**

### 10mm Field Tile

Pressed Edge

2.5"x10" Crackle | Transparent | Silk Finish

#### **Trim Pieces**

0.5"x8" Quarter Round Crackle | Transparent | Silk Finish 0.6"x10" Pencil Crackle | Transparent Finish



- All sizes are NOMINAL

Silver



**Grey Stone** 





Features	Test Method	Value	
		Crackle	Transparent
Water Absorption	ISO 10545-3	> 10%	
Craze Resistance	ISO 10545-11	N/A	Resistant
Chemical Resistance	ISO 10545-13	Class GLC	Class GA
Stain Resistance	ISO 10545-14	Class 1	Class 5

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### Product Info:

- Ceramic Tile
- Crackle | Transparent | Silk Finish
- 10mm Thickness
- Pressed Edge
- Frost Resistance = No



www.genrose.com



www.genrose.com