SHADOW HEX











4"x5" Hexagon Tile in Cobalt

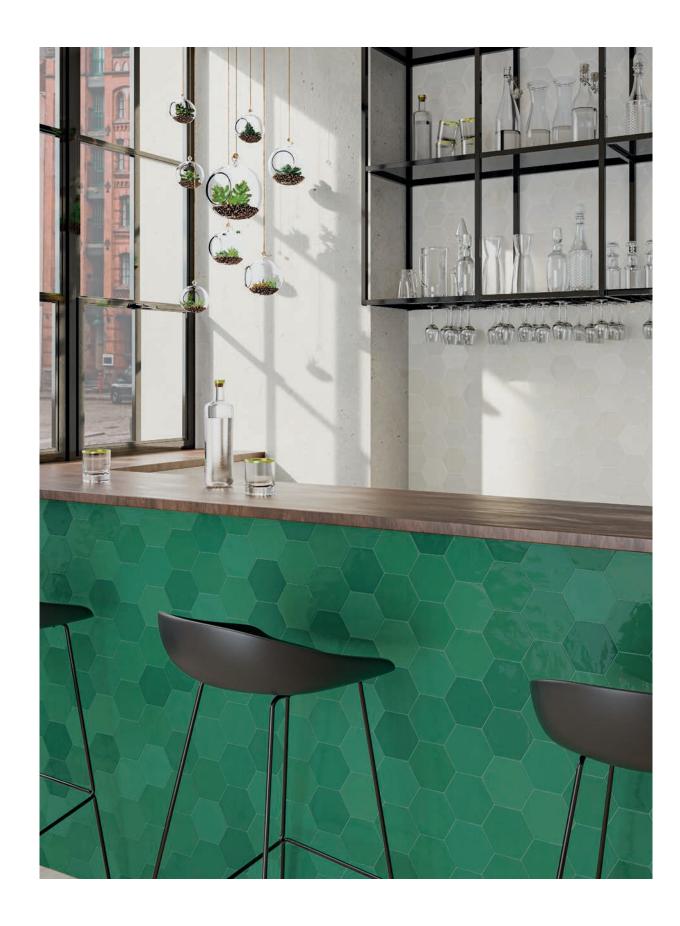

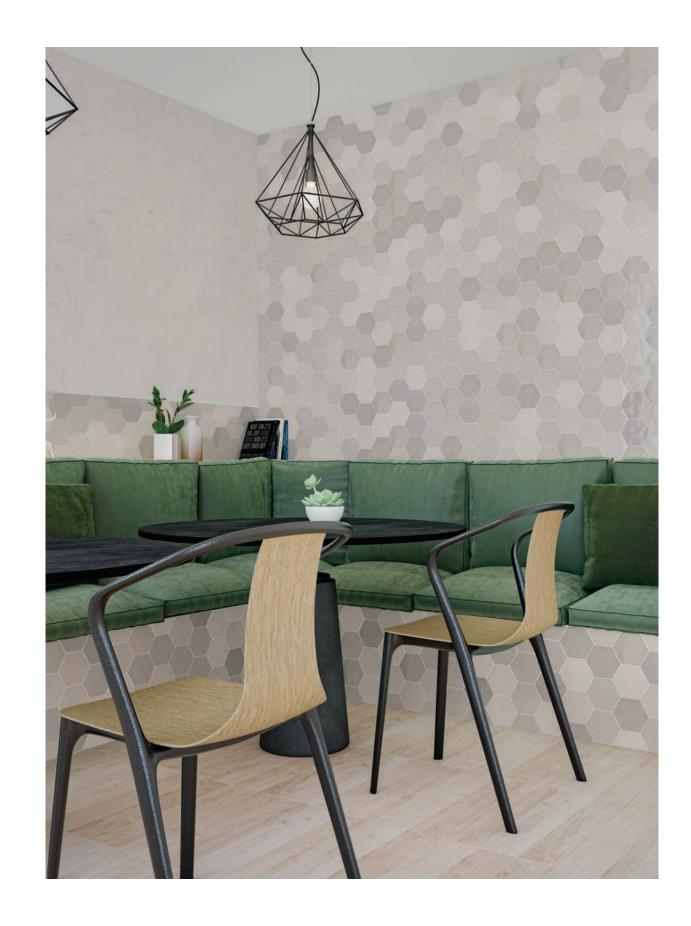

4"x5" Hexagon Tile in Emerald





4"x5" Hexagon Tile in Wine

AVAILABLE IN:

8.5mm Wall Hexagon

Pressed Edge

4"x5" Hexagon Glossy Finish

Trim Pieces


0.43"x7" Quartino Glossy Finish



- All sizes are NOMINAL



WALL HEXAGON COLOR:

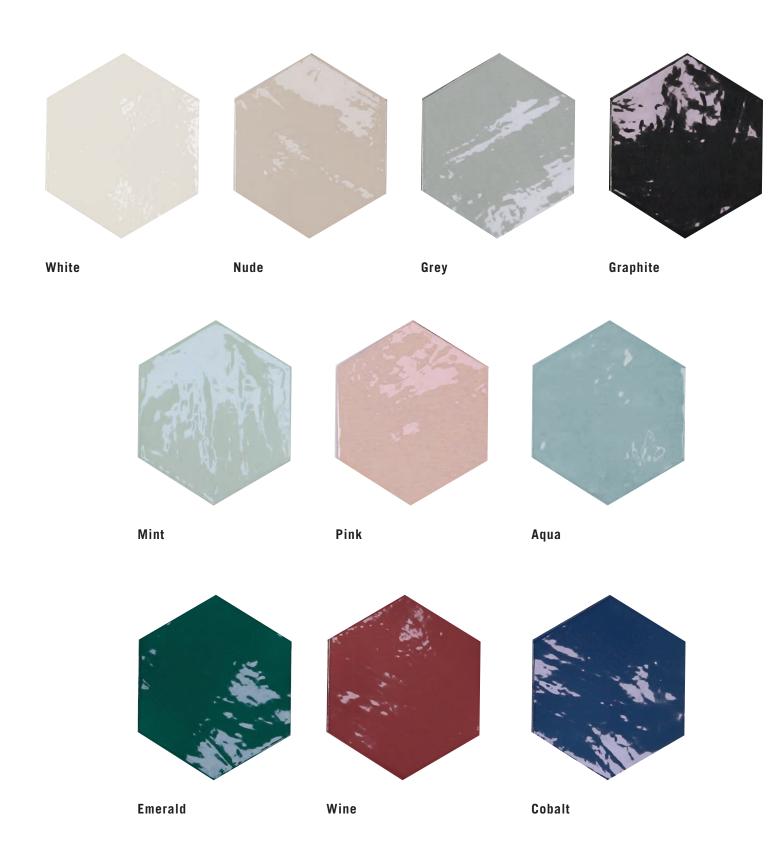

WALL HEXAGON COLOR VARIATION:

*Different shades randomly mixed within the box.









SHADOW HEX Ceramic Tile

Test Method Value **Features** 108 mm +/- 0.75 mm x 124 mm **Dimensional Features** ISO 10545-2 +/- 0.75 mm x 8.5 mm+/- 0.5 mm ISO 10545-3 $E_{b} \le 10\%$ Water Absorption Thickness ≤ 7.5 mm Min 15 N/mm² ISO 10545-4 **Modulus of Rupture** Thickness > 7.5 mm Min 12 N/mm² **Crazing Resistance** ISO 10545-11 Resistant **Household Chemical Resistance** ISO 10545-13 GΑ **Chemical Resistance** ISO 10545-13 GHA 5 ISO 10545-14 **Stain Resistance**

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Tile
- Glossy Finish
- 8.5mm Thickness
- Pressed Edge
- V4 Substantial Variation
- Frost Resistance = No



www.genrose.com



www.genrose.com