







12"x24" Field Tile in Pearl

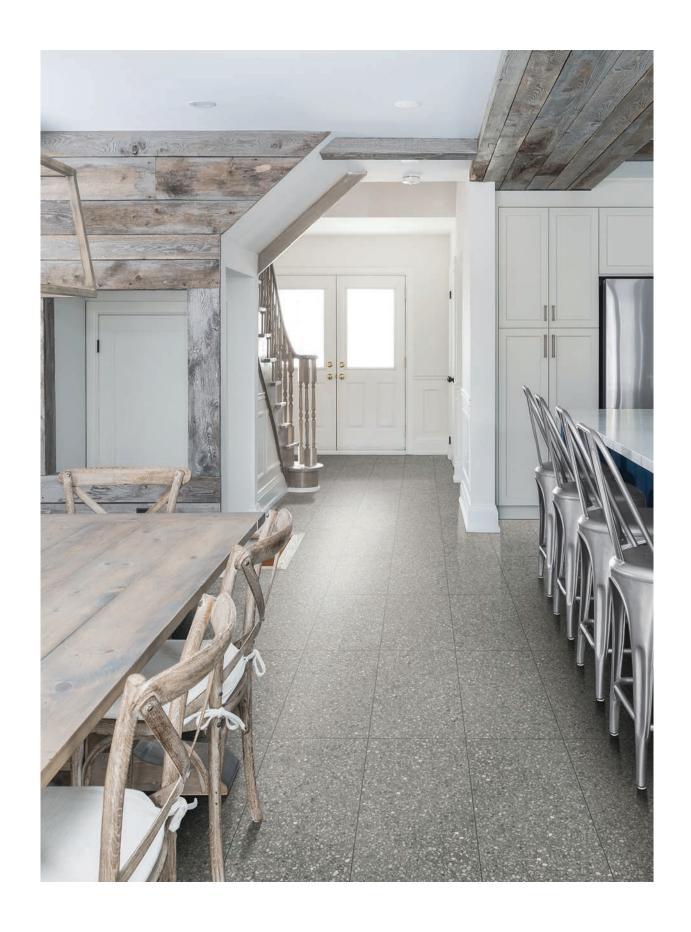

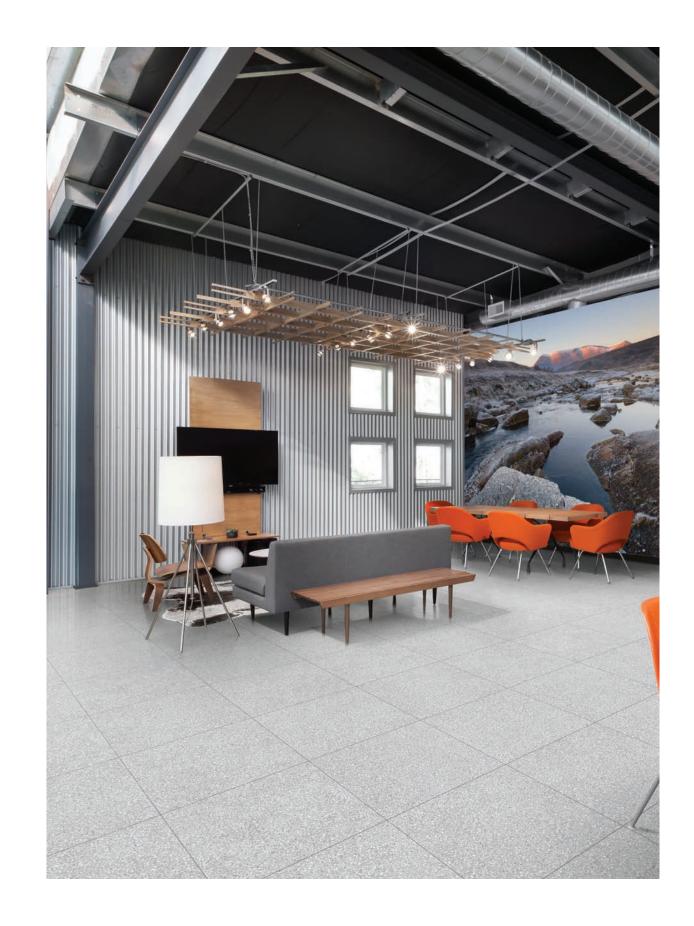

12"x24" Field Tile in Shadow





32"x32" Field Tile in Pearl

ΔVΔ	Ш	AB	ΙF	IN.
$\Delta V \Delta$		\boldsymbol{n}		

Field Tile

32"x32" 11.5mm Matte Finish 12"x24" 8.4mm Matte Finish

Mosaics

8.4mm Mosaic Matte Finish

Trim Pieces

8.4mm Bullnose Matte Finish


- All sizes are nominal	
-------------------------	--

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES CUBES		BES	BASKETWEAVE		
	Any 24" field tile can be cut down to a smaller size in any		2" 4"		1 ³ / ₈ "x3" 2"x4"
	length and width	BRI	CKS	DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD S	HAPES*	CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"			* > > >	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
\ \ \ \ Hexagon	6"		2"		41/ 11
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT SQUA		ARES	RECTANGLES		
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"



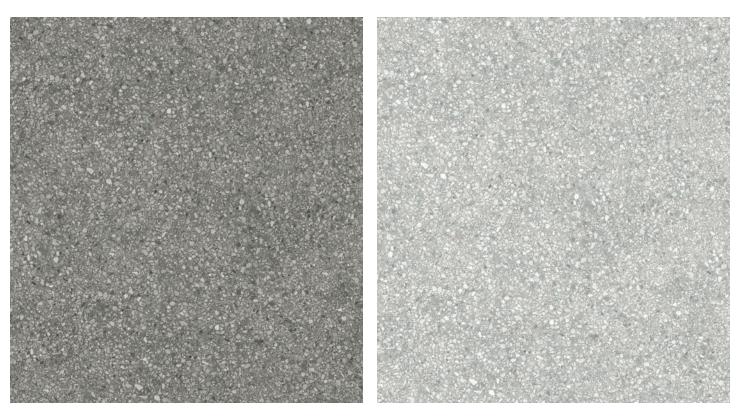


Shadow Ash



Pearl Ivory

Colors shown may vary from actual product. Final selection should be made from actual product samples.



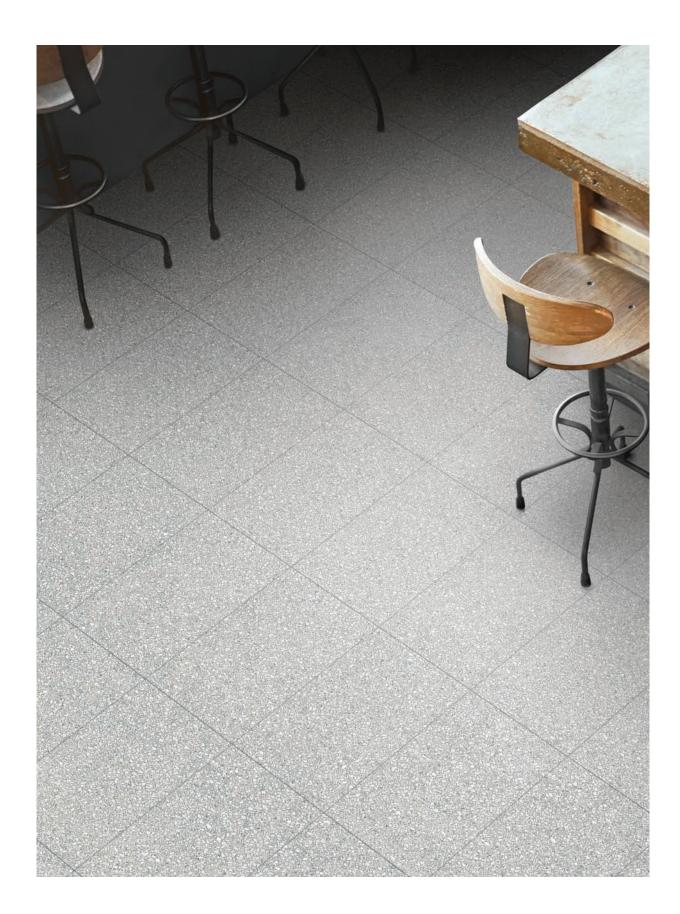



SPECKColor Body Porcelain Tile

Features	Test Method	Fixed Value
Water Absorption	ANSI / ISO - (%)	≤ 0.5%
Abrasion Resistance	ANSI / ISO	4
Scratch Hardness	ANSI / ISO - (Mohs)	6
Dunaling Chranath	ANSI - (lbf)	≥ 360
Breaking Strength	ISO - (N)	≥1600
Chemical Resistance	ANSI / ISO	Class A – Res.
Frost Resistance	ANSI / ISO	Resistant
Ctain Besistance	ANSI	CLASS A
Stain Resistance	ISO	CLASS 5
DCOF (WET)	ANSI - DCOF (WET)	≥ 0.5

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide.

Product Info:

- Color Body Porcelain Tile
- Matte Finish
- 8.4mm | 11.5mm Thicknesses
- Rectified Edge
- PEI Rating = 4
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com