

**STAGE**

 GENROSE







24"x48" Field Tile in Red Boss | Red Diving



4"x12" Wall Tile in Rust Drip White  
24"x24" Field Tile in Red Diving





4"x12" Wall Tile in Rust Drip Red  
24"x24" Field Tile in Red Diving



24"x48" Field Tile in Red Diving



## AVAILABLE IN:

### 9mm Field Tile

12"x24" Natural Finish  
 24"x24" Natural Finish  
 8"x48" Natural Finish\*\*  
 24"x48" Natural Finish

### 9mm Field Deco

24"x24" Mon Natural Finish  
 24"x48" Mon Natural Finish

### 9mm Mosaic

1"x1" Natural Finish\*  
 1"x12" Natural Finish\*

### Trim Pieces

12"x24" Elle Jolly Step Natural Finish\*  
 3.5"x24" Baseboard Natural Finish\*

### 7mm Wall Tile

4"x12" Natural Finish

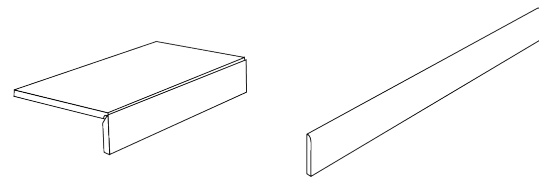
### 7mm Wall Deco

4"x12" Mon Natural Finish

- All sizes are NOMINAL

















\*Only Available in Diving

\*\*Only Available in Boss



## MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.  
 We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"
		BRICKS		DIAMONDS	
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"		2" w/ 0.6" Squares		1 1/8" 2"
	Chevron 2" x 12" 6" x 24"			RECTANGLES	
TRAPEZOID W/ DOT		SQUARES			
	4" x 2 1/2" w/ 5/8" Dot		1" x 1"    2" x 2" 1 3/8" x 1 3/8"    3" x 3"		1" x 2" 1" x 4"

\*Other sizes available upon request

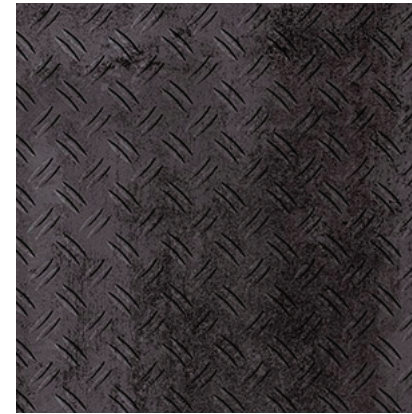
## 9MM PORCELAIN:



Grey Boss



Grey Diving



Blue Boss



Blue Diving



Red Boss

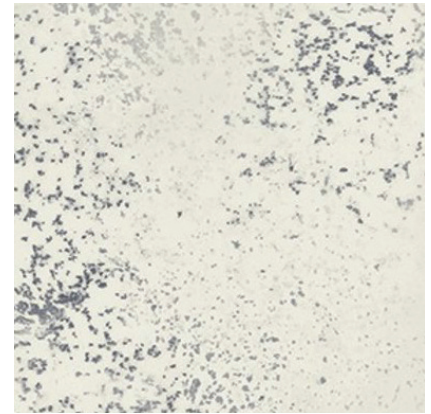


Red Diving

## 7MM CERAMIC:



Rust Drip White



Rust Drip Blue



Rust Drip Red

Colors shown may vary from actual product. Final selection should be made from actual product samples.



**4"X12" MON DECO**



Rust Drip White



Rust Drip Red



Rust Drip Blue


**24"X24" MON DECO**



Grey Diving



Red Diving



Blue Diving



Grey Boss



Red Boss



Blue Boss

**1"X12" MOSAIC**



Grey Diving




Red Diving




Blue Diving


**1"X1" MOSAIC**



Grey Diving



Red Diving



Blue Diving

**24"X48" MON DECO**



Grey Diving



Red Diving



Blue Diving




Grey Boss




Red Boss



Blue Boss

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.5%
Thickness		± 5 %
Straightness of Edges		± 0.3%
Wedging		± 0.4%
Flatness		± 0.3%
Water Absorption	ISO 10545-3	~ 16 %
Modulus of Rupture	ISO 10545-4	22 N/mm <sup>2</sup> R ≥ 15 N/mm <sup>2</sup>
Coefficient of Linear Thermal Expansion	ISO 10545-8	8 x 10 <sup>-6</sup> °C <sup>-1</sup>
Resistance to Thermal Shock	ISO 10545-9	Guaranteed
Crazing Resistance	ISO 10545-11	
Chemical Resistance	ISO 10545-13	GB min.
Stain Resistance	ISO 10545-14	Class 3 min.
 <p>This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.</p>		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.2%
Thickness		± 5 %
Straightness of Edges		± 0.2%
Wedging		± 0.2%
Flatness		± 0.2%
Water Absorption	ISO 10545-3	≤ 0.1 %
Modulus of Rupture	ISO 10545-4	55 N/mm <sup>2</sup>
Breaking Strength		> 1700 N
Abrasion Resistance	ISO 10545-7	3
Coefficient of Linear Thermal Expansion	ISO 10545-8	6.5 x 10 <sup>-6</sup> °C <sup>-1</sup>
Resistance to Thermal Shock	ISO 10545-9	Guaranteed
Frost/ Freeze Resistance	ISO 10545-12	
Chemical Resistance	ISO 10545-13	GB min.
Stain Resistance	ISO 10545-14	Class 3 min.
Slip Resistance	DIN51130	R9
Recycling Material	-	>40%
 <p>This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.</p>		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Ceramic Tile
- Natural Finish
- 7mm Thickness
- V2 - Slight Shading Variation
- Frost Resistance = No

**Product Info:**

- Glazed Porcelain Tile
- Natural Finish
- 9mm Thickness
- PEI Rating = 3
- V3 - Moderate Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)