# STARCRETE










39"x39" 3.5mm THINNER Field Tile in Velvet

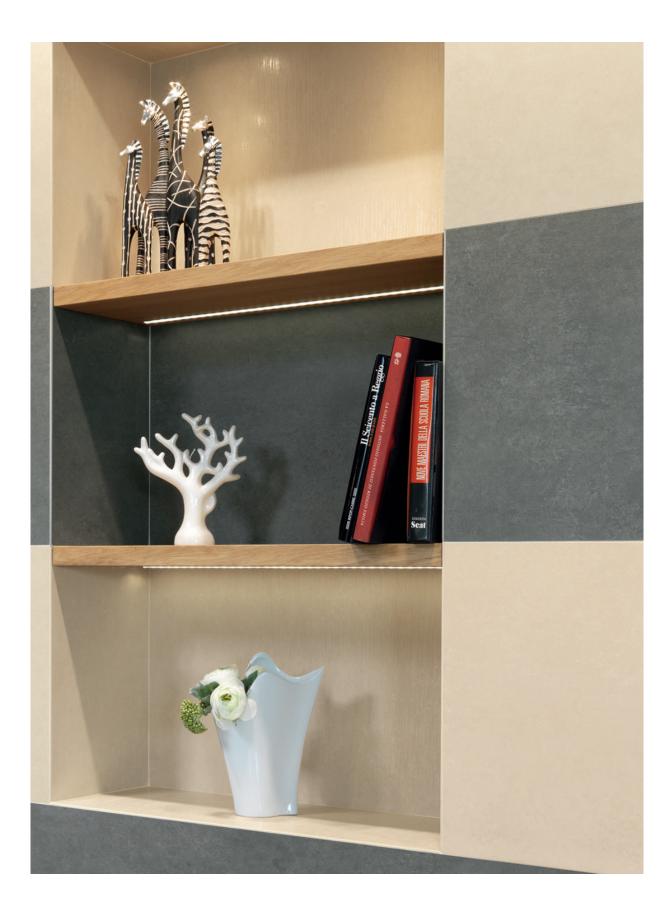



19.5"x39" 3.5mm THINNER Field Tile in Cotton 39"x118" 3.5mm THINNER Field Tile in Ask





39"x39" 3.5mm THINNER Field Tile in Ask

## **AVAILABLE IN:**

#### 10mm Field Tile

24"x24" Matte Finish Rectified Edge 12"x24" Matte Finish Rectified Edge

### **10mm Mosaics**

2"x2" Mosaic Matte Finish Rectified Edge

#### **10mm Trim Pieces**

Bullnose Matte Finish Rectified Edge 3"x12"

- All sizes are nominal

### MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1″ minimum.		1"x2" 1"x3" 1 <sup>3</sup> /8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"			*	<sup>5</sup> / <sub>8</sub> "x4"
		OCTAGONS		HEXAGONS	
	6"		2"		417 11
Chevron	2"x12" 6"x24"		z w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

3.5mm THINNER Field Tile

Matte Finish

Matte Finish

Matte Finish

19.5"x39"

39"x118"

39″x39″

Eclipse



Ask



Titanium

\*Other sizes available upon request



Nut



Velvet



Cotton



## 2"X2" MOSAIC



39"x39" 3.5mm THINNER Field Tile in Eclipse 39"x118" 3.5mm THINNER Field Tile in Nut | Eclipse



Features	
Thickness	3.5mr
Water Absorption	≤ 0.19
Exterior Rated	Yes
DCOF AcuTest	Fail
Glaze Hardness	7 moh
Breaking Strength	≥250 II
Durability Classification	IV Comme
Deep Abrasion	P1
Recycled Material	≥40%



This product is GREENGUARD<sup>®</sup> certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Color Body Porcelain Tile
- Matte Finish
- 10mm | 3.5mm Thicknesses
- Rectified Edge
- PEI Rating = 2 Ask | Eclipse | Nut | Velvet 3 - Titanium
  - 4 Cotton
- Frost Resistance = Yes
- V2 Slight Shading Variation

#### **STARCRETE** Color Body Porcelain Tile

Value			
n	10mm		
%	≤ 0.5%		
	-		
	Pass		
IS	7 mohs		
bf	≥510 lbf		
ercial	Residential, Light Commercial & Heavy Commercial		
	-		
/ 0	≥40%		
will contribute to US	GBC registered LEED projects		



www.genrose.com



www.genrose.com