
UNION







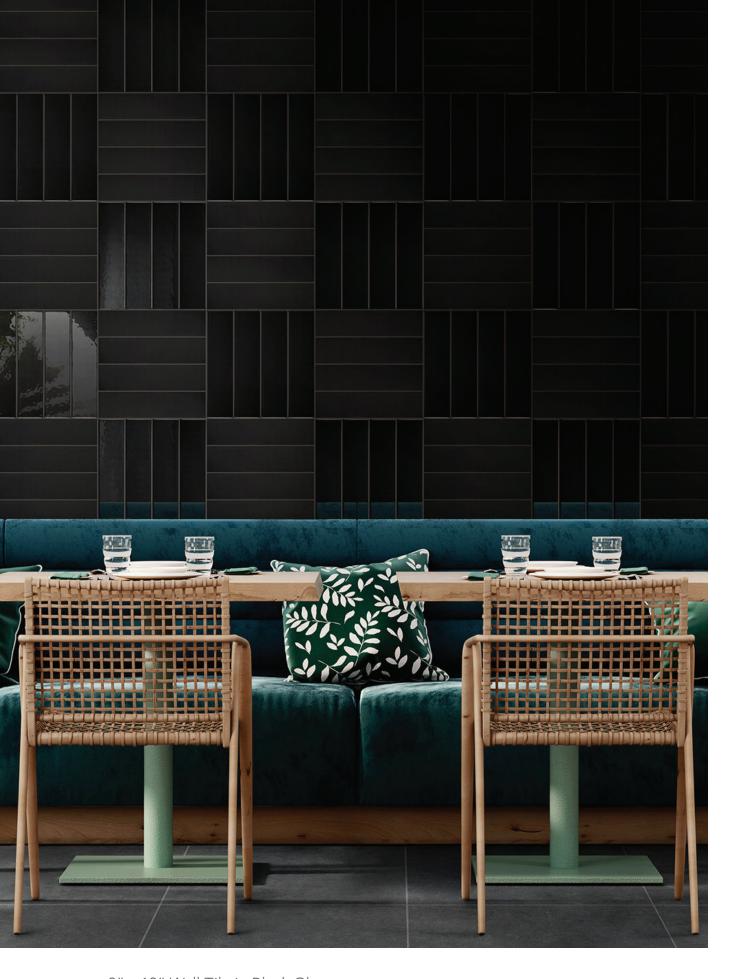

3" x 12" Wall Tile in Black Glossy 3" x 12" Wall Tile in Black Matte

AVAILABLE IN:

| 7mm Wall Tile | s | | | |
|----------------|----------|--------|----------------------|----------------------|
| SIZE | FINISH | | STOCKED COLORS | SPECIAL ORDER COLORS |
| 3" × 6" | Glossy | | Cream Grey White | Black |
| | Matte | | White | Black |
| 7.8mm Wall Til | es | | | |
| SIZE | FIN | NISH | STOCKED COLORS | SPECIAL ORDER COLORS |
| 3" x 12" | Glossy | | Cream Grey White | Black |
| | Matte | | White | Black |
| 4" 4" | Glossy | | Cream Grey White | Black |
| 4" x 16" | Matte | | White | Black |
| rim Pieces | | | | |
| SIZE | TYPE | FINISH | STOCKED COLORS | SPECIAL ORDER COLORS |
| 3" × 6" | Bullnose | Glossy | Cream Grey White | Black |
| | | Matte | White | Black |
| 2" 12" | Bullnose | Glossy | Cream Grey White | Black |
| 3" x 12" | | Matte | White | Black |
| 4" 1/" | Bullnose | Glossy | Cream Grey White | Black |
| 4" x 16" | | Matte | White | Black |














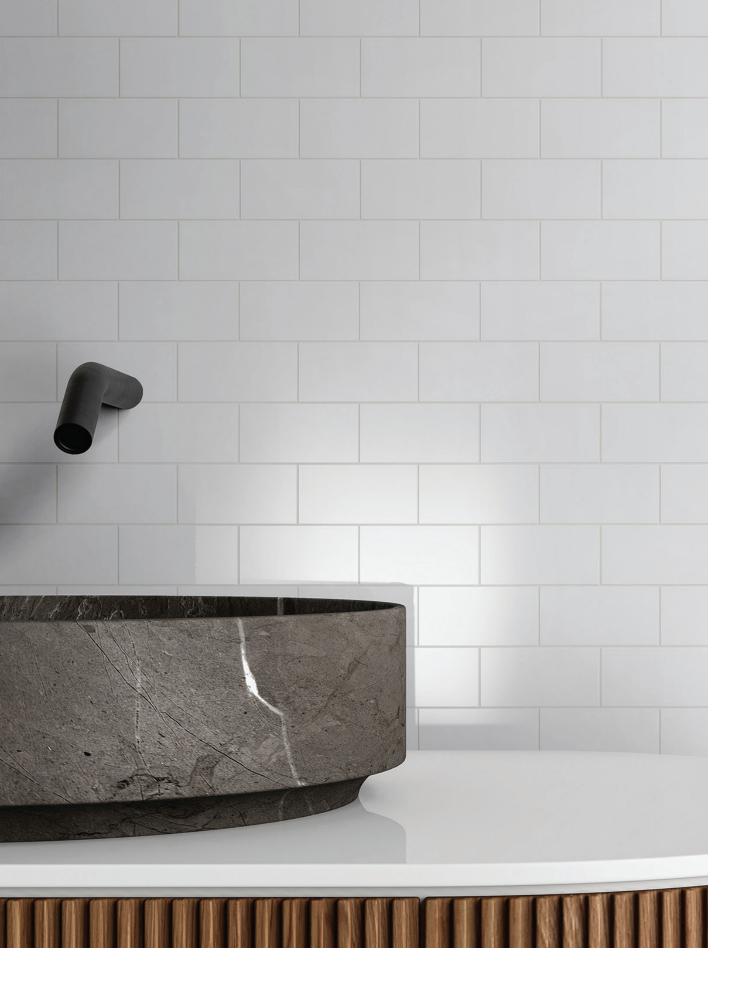





| Features | Test Method | Value |
|--------------------------|-------------|------------------|
| Water Absorption | ASTM C373 | 14.8%-17.1%2 |
| Breaking Strength | ASTM C648 | ≥ 150 lbf. avg |
| Linear Thermal Expansion | ASTM C372 | Conforms |
| Thermal Shock Resistance | ASTM C484 | Conforms |
| Chemical Resistance | ASTM C650 | Conforms |
| Stain Resistance | ASTM C1378 | Conforms |
| Frost Resistance | ASTM C1026 | No |
| Bond Strength | ASTM C482 | Conforms |
| Thickness | ASTM C499 | max ± 0.030 inch |
| Surface Hardness | Mohs Scale | 5 Mohs |
| Warpage Edge | ASTM C485 | Conforms |
| Warpage Diagonal | ASTM C485 | Conforms |
| Recycled Content | - | 7% |





This product will contribute to USGBC registered LEED projects.

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

Low Emissions Material • Zero VOC

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Wall Tile
- Matte | Glossy Finishes
- 7mm | 7.8mm Thicknesses
- Pressed Edge
- V1 Uniform Appearance
- Frost Resistance = No



www.genrose.com



www.genrose.com