TANAMI









48"x106" Field Tile in Sand

AVAILABLE IN:

9mm Field Tile

48"x106" Matte Finish 36"x106" Matte Finish 48"x48" Matte | Anti-Slip Finish* Matte | Anti-Slip Finish 24"x48" Matte | Anti-Slip Finish* 36"x36" Matte | Anti-Slip Finish 18"x36" 24"x24" Matte | Anti-Slip Finish 12"x24" Matte | Anti-Slip Finish

9mm Mosaics

1"x1" Mosaic Matte | Anti-Slip Finish
2"x2" Mosaic Matte | Anti-Slip Finish
1.2"x6" Mosaic Matte | Anti-Slip Finish
12"x12" Sheet Mureto Mosaic Matte | Anti-Slip Finish
24"x24" Sheet Deco Mosaic Matte | Anti-Slip Finish

- All sizes are nominal

6mm Wall Tile

36"x106" Matte Finish 24"x106" Matte Finish

9mm Trim Pieces

2"x24"	Baseboard Matte Finish
2"x36"	Baseboard Matte Finish
2"x48"	Baseboard Matte Finish
13"x24"	Step Matte Anti-Slip Finish
13"x36"	Step Matte Anti-Slip Finish
13"x48"	Step Matte Anti-Slip Finish
13"x24"	Corner Step Matte Anti-Slip Finish
13"x36"	Corner Step Matte Anti-Slip Finish
13"x48"	Corner Step Matte Anti-Slip Finish






MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1 ³ / ₈ "x3" 2"x4"
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"			* > > >	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
\ \ \ \ Hexagon	6"		2"		11/ "
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"


^{*}Other sizes available upon request

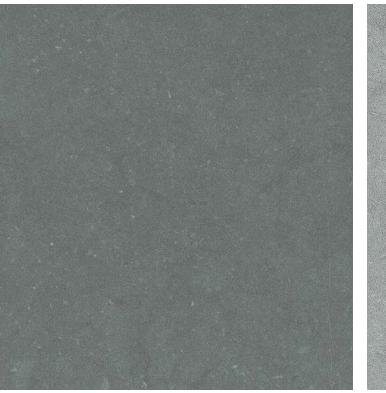



Anthracite

Dark Grey

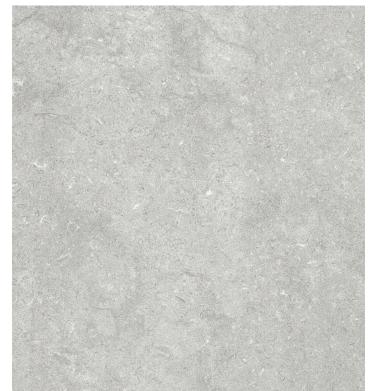





Grey Sand

^{*}Sand and Grey are also available in 20mm thickness

1"X1"MOSAIC











2"X2"MOSAIC











1.2"X6"MOSAIC










MURETO MOSAIC









DECO MOSAIC











TANAMI

Color Body Porcelain Tile

Features	Test Method	Value		
Surface Quality	ISO 10545-2	Min. 95% of tiles without defects		
Water Absorption	ISO 10545-3	≤ 0.5		
Bending Strength	ISO 10545-4	> 52 N/mm ²		
Breaking Strength	ISO 10545-4	> 2500 N		
Deep Abrasion Resistance	ISO 10545-6	<109 mm ³		
Crazing Resistance	ISO 10545-11	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Chemical Resistance	ISO 10545-13	Low Concentration Domestic Chemicals GLA/GHA GA		
Stain Resistance	ISO 10545-14	Cla	Class 5	
Slip Resistance	UNE ENV 12633	Class 1 Natural Class 3 Antislip		
Critical Angle of Slip	DIN 51130	I	R9 Natural R11 Antislip	
Reaction to Fire Test	UNE EN 13501-1:2002	A1 / A1FL		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide.

Product Info:

- Color Body Porcelain Tile
- Matte | Anti-Slip Finishes
- 6mm | 9mm | 20mm Thicknesses
- Rectified Edge
- PEI Rating = 3 Anthracite
 - 4 Sand | Grey | Dark Grey
- Frost Resistance = Yes
- V2 Slight Shading Variation



www.genrose.com



www.genrose.com