
## **SOUTH BANK**








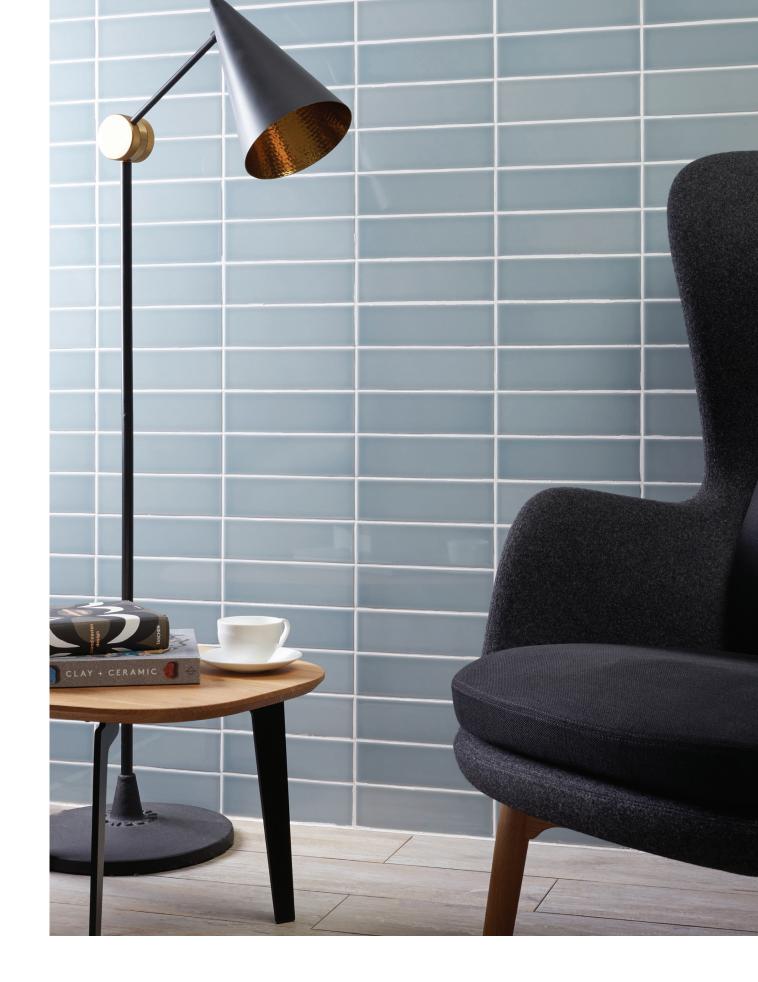


3"x9.5" Wall Tile in Pewter

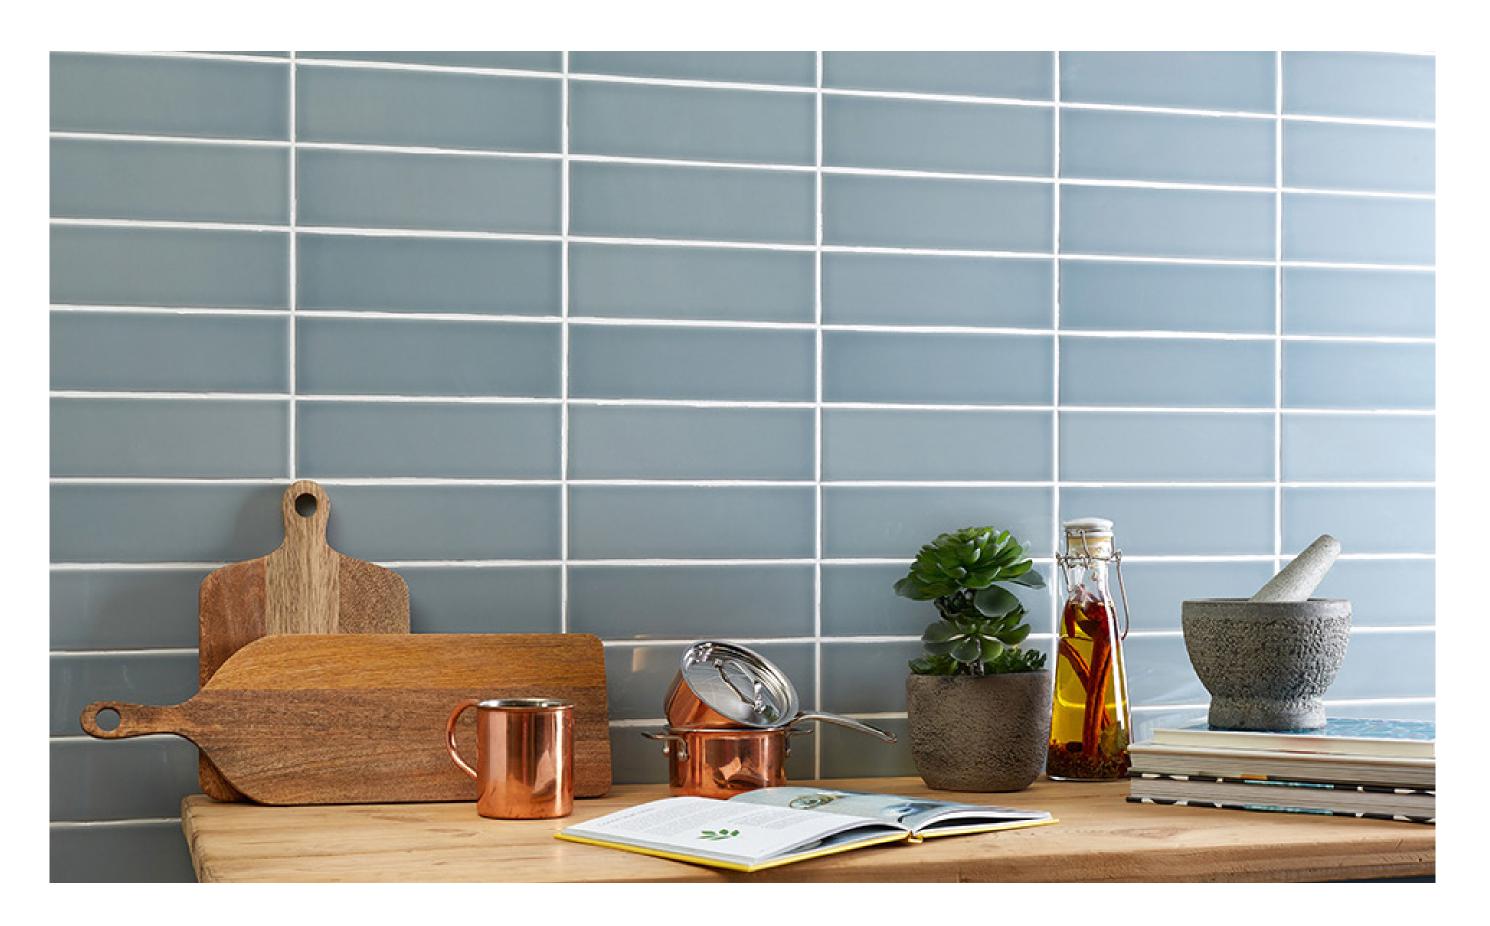

## **AVAILABLE IN:**

8mm Wall Tiles					
SIZE	FINISH		COLORS		
3"x9.5"	Gloss		White   Pearl   Whisper   Pewter		
8mm Trim Pieces					
SIZE	TYPE	FINISH	COLORS		
5/8"X12"	Finishing Strip	Gloss	White   Pearl   Whisper   Pewter		
3"x9.5"	Bullnose - 9" Side	Gloss	W	nite	
3"x9.5"	Bullnose - 3" Side	Gloss	W	nite	

All Sizes are Nominal.





Pearl





Whisper Pewter







Features	Test Method	Value
Thickness	EN ISO 10545 - 2	± 2.5%
Length / Width		≤ ± 0.25%
Straightness of Side		± 0.15%
Rectangularity		± 0.4%
Surface Flatness		± 0.3%
Water Absorption	EN ISO 10545 - 3	15% to 17%
Weight / M <sup>2</sup>	-	16.00 kg
Modulus of Rupture	EN ISO 10545 - 4	≥ 25N / mm²
Thermal Shock	EN ISO 10545 - 9	Pass
Frost Resistance	EN ISO 10545 - 12	Not Suitable
Chemical Resistance	EN ISO 10545 - 13	Class A - B
Stain Resistance	EN ISO 10545 - 14	Class 3
Fire Rating	-	Class A1 / Non Combustible
Recycled Content	-	Up to 20%

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.





## **Product Info:**

- Ceramic Tile
- Gloss Finish
- 8mm Thickness
- V3 Moderate Variation
- Frost Resistance = No



www.genrose.com



www.genrose.com